


SWITCH CIRCUIT			MATERIAL AND FINISH AS BELOW						
WHEN CARD IS EJECTED	WHEN CARD IS INSERTED	A	Housing	PA66 UL94V-0, Color: Black	E				
		B	Insert	PBT, Color: Black	F				
		C	Contact	Phosphor Bronze, Gold Plating Over Nickel, T=0.35	G				
		D	Shell	Brass, C2680	H				

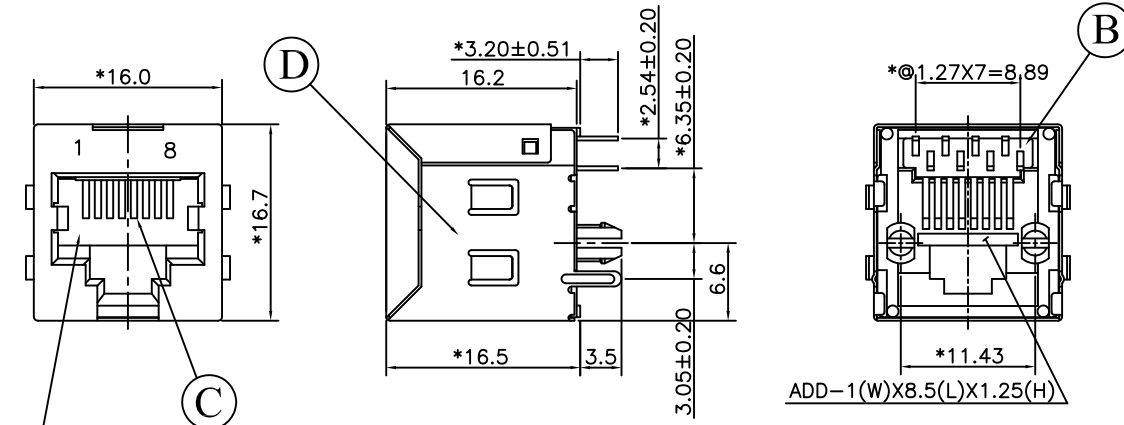

### SPECIFICATION:

- ELECTRICAL**
  - Current Rating: 125VAC
  - Voltage Rating: 1.5AMP
  - Contact Resistance: 30mΩ Max
  - Insulation Resistance: 1000MΩ Min
  - Dielectric Withstanding Voltage: 1000VAC 60Hz, 1minute


- MECHANICAL**
  - Durability: 750 Cycle

- ENVIRONMENTAL**
  - Operating temperature range: -40°C to +85°C
  - Storage temperature range: -40°C to +85°C

- SOLDER ABILITY**
  - Recommended Wave Soldering Temperature: 260°C
  - Recommended PCB Thickness: 1.6mm
  - PCB Retention Pre-Solder: 1 LB Min
  - PCB Retention Post-Solder: 10 LB Min

PRODUCT NUMBER:  
210A-11 X 0 A -RA10  
1 2 3

- No. of Contact  
11:1X1 Port
- Contact Plating  
C:5u" Gold Plating
- EMI Tab  
A: With EMI Tab

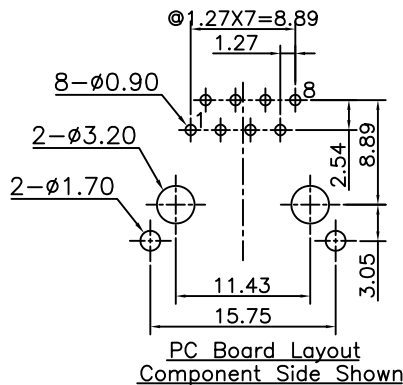

P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12
----	----	----	----	----	----	----	----	----	-----	-----	-----

#### PIN ASSIGNMENT

PRODUCT NO.	DESCRIPTION	
	UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANGLES	ANG.	±5°
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWN	UNIT: mm
DRAWN	Willis	2012/09/04
CHECKED	Angel	2012/09/04
APPROVED	Ken	2012/09/04
DRAWN NAME:		RJ45 Jack With Shielded Type
PRODUCT NO.	210A-11C0A-RA10	
FILE NAME	210A-11C0A-RA10_B_2	



www.attend.com.tw

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE
1			4		
2			5		
3			6		
7			8		
9			10		

- Revise:
- Revise:
- Revise:



SIZE A4 REV. 1.0