

COMPACT HIGH POWER RELAY

1 POLE—12 A (28 VDC)

(FOR 24 V BATTERY AUTOMOTIVE APPLICATIONS)

FBR57 SERIES

■ FEATURES

- High power contact capacity
(carrying current: 40 A/2 minutes, 30 A/1 hour)
- Suitable for controlling 24 V motors in trucks and other large vehicles
- High heat resistance and extended operating voltage



■ ORDERING INFORMATION

[Example] $\frac{\text{FBR57}}{\text{(a)}} \frac{\text{N}}{\text{(b)}} \frac{\text{D24}}{\text{(c)}} - \frac{\text{W}}{\text{(d)}} \frac{\text{**}}{\text{(e)}}$

(a)	Series Name	FBR57 : FBR57 Series relay for 24 V battery (contact gap 0.8 mm)
(b)	Enclosure	N : Plastic sealed type
(c)	Nominal Voltage	D24 : 24 VDC
(d)	Contact Material	W : Silver-tin oxide indium N : Silver copper nickel
(e)	Custom Designation	To be assigned custom specification

FBR57 SERIES

■ SPECIFICATIONS

Item		Specifications	
Contact	Arrangement	1 form C	
	Material	Silver-tin oxide indium (-W type) Silver copper nickel (-N type)	
	Voltage Drop (resistance)	Maximum 100 mV (at 2 A 12 VDC)	
	Ratings	28 VDC 12 A (locked motor load) 28 VDC inrush 15 A, break 2.5 A (motor free load)	
	Maximum Carrying Current	40 A/2 minutes, 30 A/1 hour (25°C, 100% rated coil voltage)	
	Maximum Inrush Current	-W type: 60 A (reference) -N Type: 40 A	
	Maximum Switching Current	12 A 28 VDC (reference)	
	Minimum Switching Load*1	-W type: 6 VDC, 1 A -N type: 6 VDC, 2 A (reference)	
Coil	Operating Temperature	-40°C to +85°C (no frost) (refer to the CHARACTERISTIC DATA)	
	Storage Temperature	-40°C to +100°C (no frost)	
Time Value	Operate (at nominal voltage)	Maximum 10 ms	
	Release (at nominal voltage)	Maximum 5 ms	
Life	Mechanical	1 × 10 ⁶ operations minimum	
	Electrical	1 × 10 ⁵ operations minimum (locked motor load) 5 × 10 ⁵ operations minimum (motor free load)	
Other	Vibration Resistance		10 to 55 Hz (double amplitude of 1.5 mm)
	Shock Resistance	Misoperation	100 m/s ²
		Endurance	1,000 m/s ²
	Weight		Approximately 9.4 g

*1 Values when switching a resistive load at normal room temperature and humidity, and in a clean environment.
The minimum switching load varies with the switching frequency and operating environment.

■ COIL DATA CHART

MODEL		Nominal voltage	Coil resistance (±10%) (at 20°C)	Must operate voltage	Thermal resistance
W contact	N contact				
FBR57ND24-W	FBR57ND24-N	24 VDC	384 Ω	14.4 VDC (at 20°C) 18.0 VDC (at 85°C)	67°C/W


FBR57 SERIES

■ PRINCIPAL APPLICATIONS


Application		Normal load current	Life x 10 ³	Recommended model (example)
For 24 V battery	Power Windows	10 to 12 A (switching at motor locking)	100	FBR57N□-W
	Automatic Door Lock	5 A/2 door (switching at motor locking)	100	FBR57N□-W
	Intermittent Wipers	INRUSH 15 to 30 A BREAK 2 to 8 (motor free)	300	FBR57N□-N

■ CHARACTERISTIC DATA

1. MAXIMUM BREAK CAPACITY

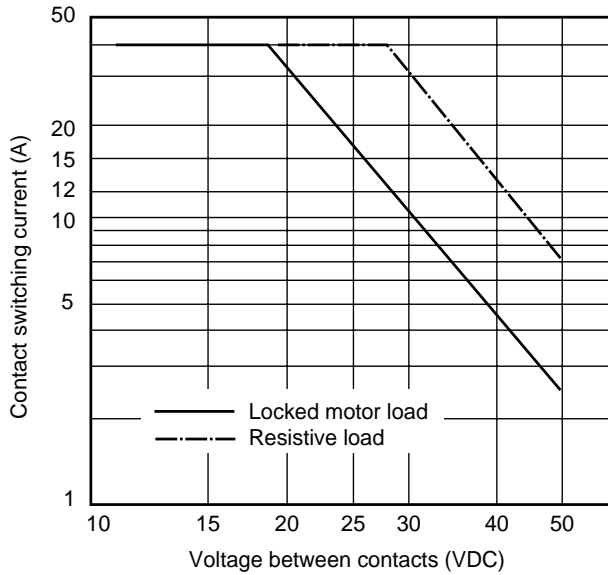


2. LIFE

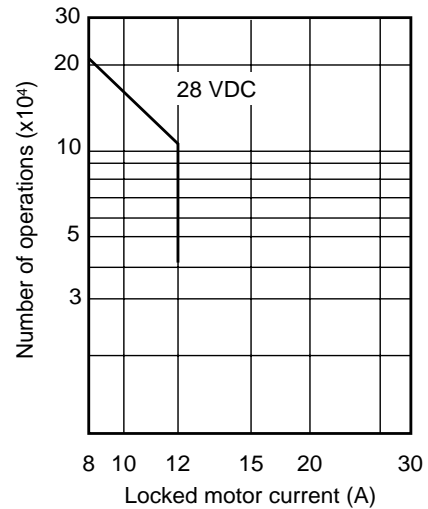


FBR57 SERIES

3. LIFE TEST (EXAMPLE)


- Test item
28 V DC-12 A INRUSH
Motor lock
100,000 operations minimum
(FBR57 □-W type)
- Test circuit




- Shift of pick-up and drop-out voltage

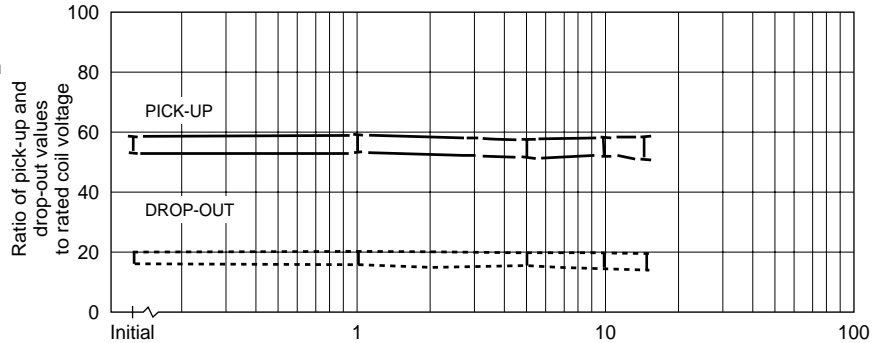


- Current wave form




- Shift of contact resistance

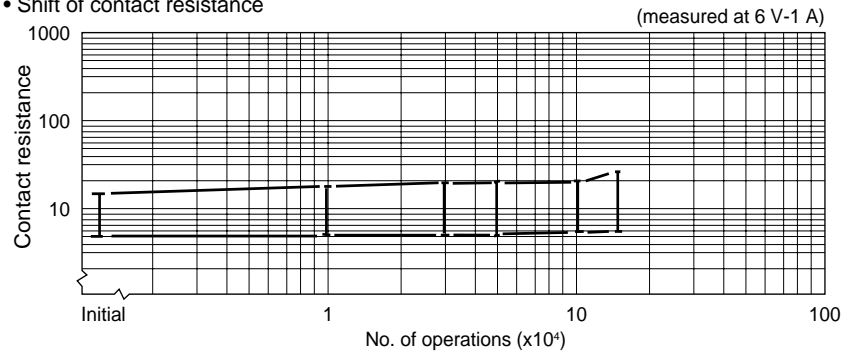

4. COIL TEMPERATURE RISE

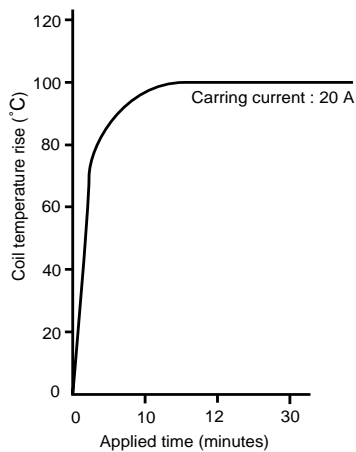


5. OPERATING COIL VOLTAGE RANGE (EXAMPLE)

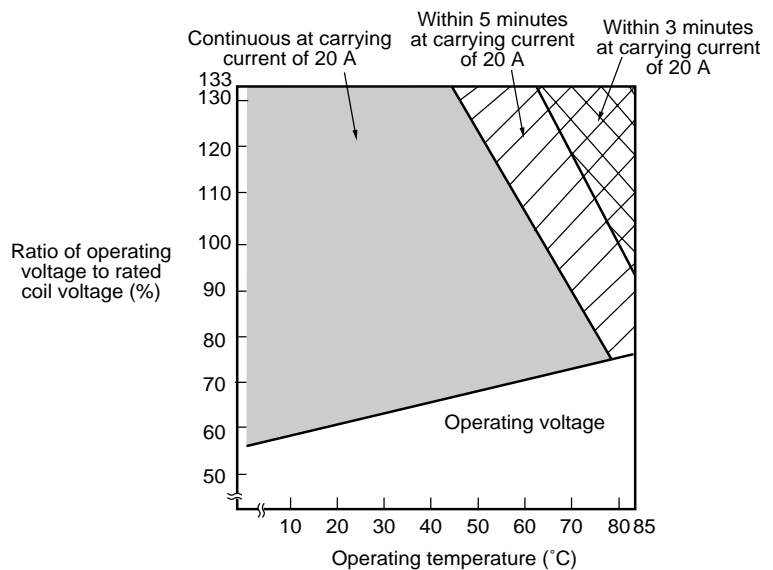


FBR57 SERIES

6. VIBRATION RESISTANCE CHARACTERISTICS



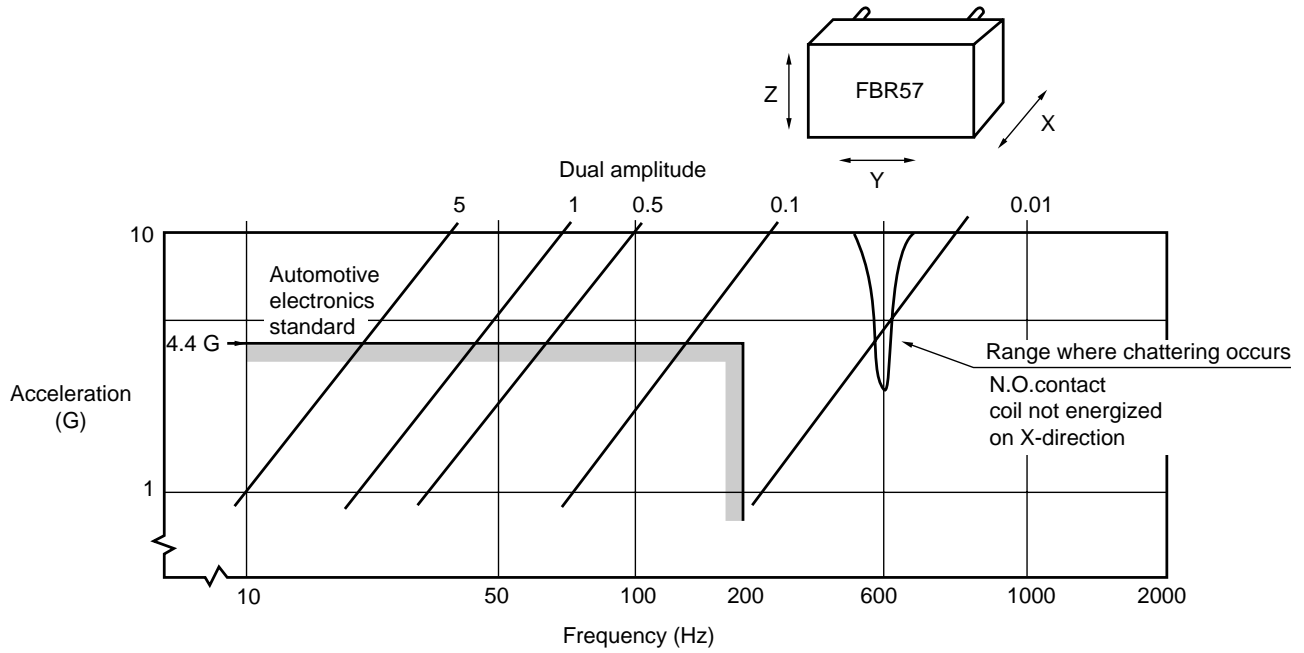


7. SHOCK RESISTANCE CHARACTERISTICS

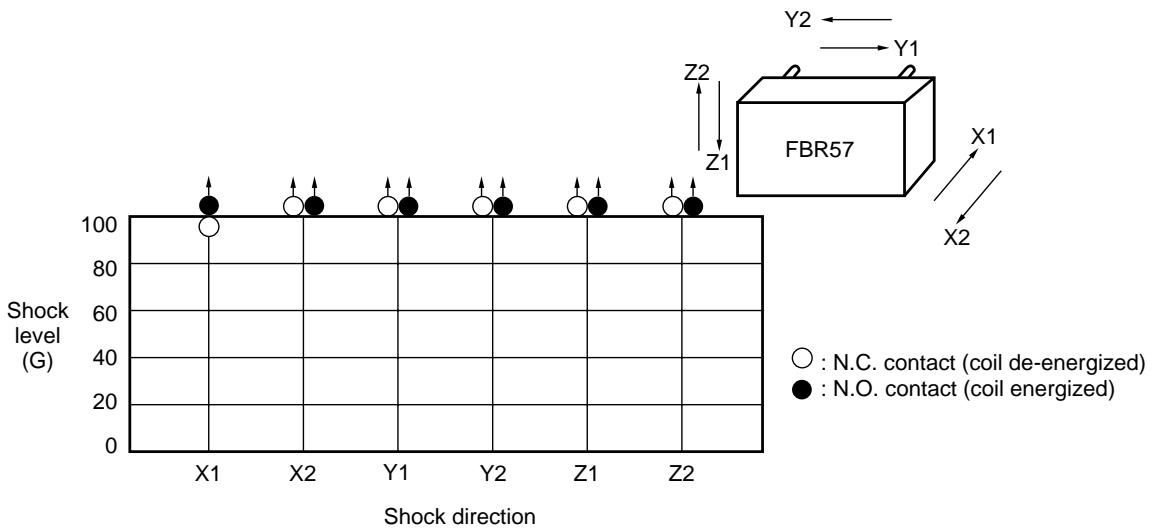




FBR57 SERIES

REFERENCE DATA

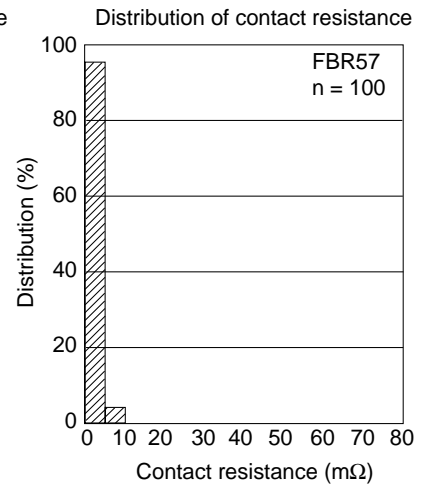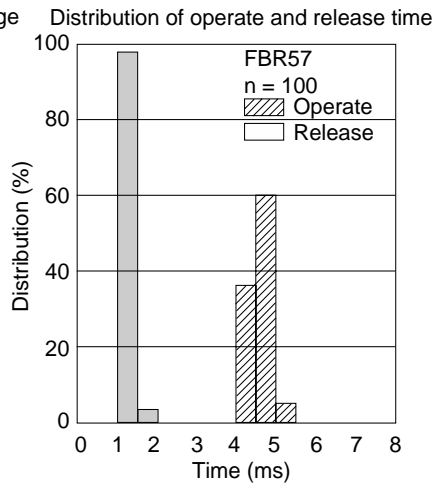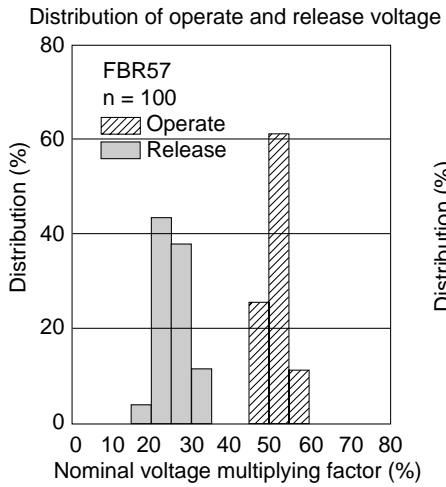


DIMENSIONS


Dimensions

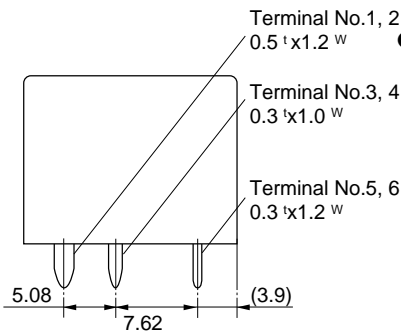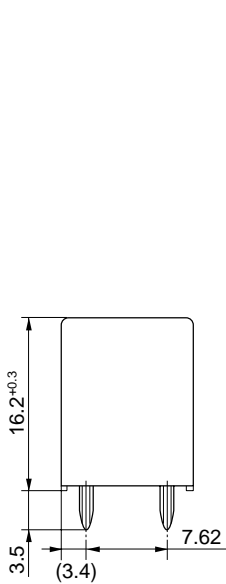


PC board mounting hole layout (BOTTOM VIEW)



Schematic (BOTTOM VIEW)



Tube carrier

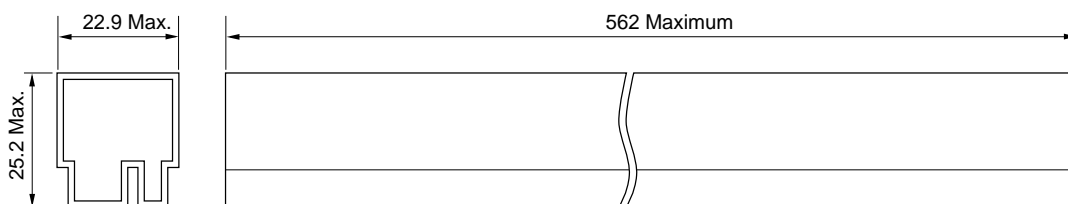

35 pieces/tube

Unit : mm

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: marcom@fcai.fujitsu.com
Web: www.fcai.fujitsu.com

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: www.fceu.fujitsu.com

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#04-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 375-8560
Fax: (65) 273-3021
Email: fcal@fcal.fujitsu.com
www.fcal.fujitsu.com

© 2002 Fujitsu Components America, Inc. All company and product names are trademarks or registered trademarks of their respective owners. Rev. 03/2002