


TOUCH PANEL CONTROL BOARD 4-WIRE USB


N16B-0558-B710 USB Interface Controller Board Quick Reference

4-Wire Resistive Touch Panels

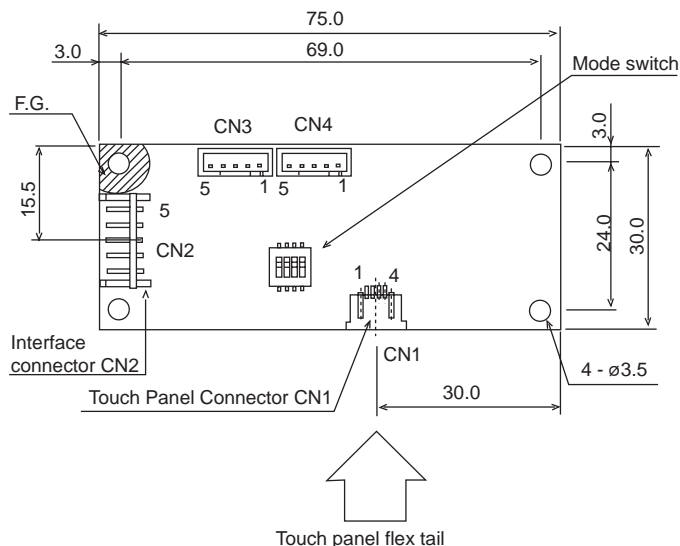

■ FEATURES

- High quality and reliability touch panel control board with integrated switch for selectable cable tail exit direction for FPC cable 4-wire touch panels.
- USB 1.1 bus powered interface for direct connection to PC or alternative USB interfaces.

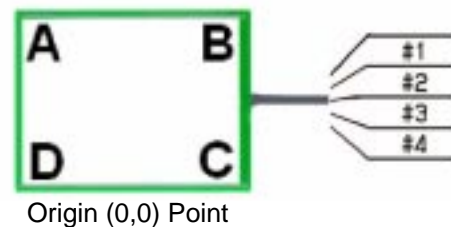

■ SWITCH SETTINGS

SW1	Orientation mode selection switches	OFF		ON		OFF		ON		<table><tr><th colspan="2">Connector Pin Assignment</th></tr><tr><td>#1</td><td>Top</td></tr><tr><td>#2</td><td>Right</td></tr><tr><td>#3</td><td>Bottom</td></tr><tr><td>#4</td><td>Left</td></tr></table>	Connector Pin Assignment		#1	Top	#2	Right	#3	Bottom	#4	Left	Type A
Connector Pin Assignment																					
#1		Top																			
#2	Right																				
#3	Bottom																				
#4	Left																				
SW2	ON		OFF		OFF		ON														
SW3	OFF		OFF		ON		ON														

SW1	Orientation mode selection switches	ON		OFF		ON		OFF		<table><tr><th colspan="2">Connector Pin Assignment</th></tr><tr><td>#1</td><td>Left</td></tr><tr><td>#2</td><td>Top</td></tr><tr><td>#3</td><td>Right</td></tr><tr><td>#4</td><td>Bottom</td></tr></table>	Connector Pin Assignment		#1	Left	#2	Top	#3	Right	#4	Bottom	Type B
Connector Pin Assignment																					
#1		Left																			
#2	Top																				
#3	Right																				
#4	Bottom																				
SW2	OFF		OFF		ON		ON														
SW3	OFF		ON		ON		OF														

Connector Pin Assignment listed on individual touch panel drawings.

USB 4 -Wire Control Board

■ CONSTRUCTION

Specification Item		N16B-0558-B720 7-Wire USB Control Board
Mechanical	Size / Weight	75mm x 30mm / 30g
Electrical	Supply Voltage (max./min.)	Vcc 5.5V/4.1V
	Operating current (detect)	36 mA at Vcc = 5V and T = 25 degrees
	Sleep Mode current	6 mA at Vcc = 5V and T = 25 degrees
Environment	Operating Temperature	-5° C to +60° C
	Storage Temperature	-30° C to +70° C
	Humidity	20%RH to 85% RH at +38° C maximum wet bulb temperature

■ INTERFACE CONNECTION CN2 (JST #: S5B EH)

1.	+5V (Vcc)	3.	D-(Signal)	5.	Frame Ground
2.	D+ (Signal)	4.	Ground		

Complete specification document is available on request for customers with whom we have an approved NDA in place.

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: marcom@fcai.fujitsu.com
Web: www.fcai.fujitsu.com

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: www.fceu.fujitsu.com

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#04-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 375-8560
Fax: (65) 273-3021
Email: fcal@fcal.fujitsu.com
www.fcal.fujitsu.com

© 2004 Fujitsu Components America, Inc. All company and product names are trademarks or registered trademarks of their respective owners. Rev. 04/28/2004.