


AQ3118 Series 0.3pF 10KV Bidirectional Discrete TVS



Description

The AQ3118 includes back-to-back TVS diodes fabricated in a proprietary silicon avalanche technology to provide protection for electronic equipment that may experience destructive electrostatic discharges (ESD). These robust diodes can safely absorb repetitive ESD strikes up to the maximum level specified in the IEC 61000-4-2 international standard without performance degradation. The back-to-back configuration provides symmetrical ESD protection for data lines when AC signals are present.


Pinout



Features

- ESD protection of $\pm 10\text{kV}$ contact discharge, $\pm 15\text{kV}$ air discharge, (IEC 61000-4-2)
- EFT protection, IEC 61000-4-4, 40A ($t_p=5/50\text{ns}$)
- Lightning Protection, IEC 61000-4-5 2nd edition, 2A ($t_p=8/20\mu\text{s}$)
- Low capacitance of 0.3pF @ $V_R=0\text{V}$
- Low leakage current of 50nA (max) at 18V
- Space efficient 0402 footprint
- Halogen free, Lead free and RoHS compliant
- MSL Level 1

Functional Block Diagram



Applications

- Tablets
- Ultrabook
- eReader
- Smart Phones
- Digital Cameras
- MP3/ PMP
- Set Top Boxes
- Portable Medical
- NFC and FeliCa

Absolute Maximum Ratings

Symbol	Parameter	Value	Units
I_{PP}	Peak Current ($t_p=8/20\mu s$)	2.0	A
T_{OP}	Operating Temperature	-40 to 125	°C
T_{STOR}	Storage Temperature	-55 to 150	°C

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.


Electrical Characteristics ($T_{OP}=25^{\circ}C$)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Reverse Standoff Voltage	V_{RWM}				18	V
Reverse Leakage Current	I_{LEAK}	$V_R=18V$ with 1pin at GND		1	50	nA
Clamp Voltage ¹	V_C	$I_{PP}=1A$, $t_p=8/20\mu s$, Fwd		31	35	V
		$I_{PP}=2A$, $t_p=8/20\mu s$, Fwd		34	38	V
ESD Withstand Voltage ¹	V_{ESD}	IEC 61000-4-2 (Contact)	± 10			kV
		IEC 61000-4-2 (Air)	± 15			kV
Dynamic Resistance ²	R_{DYN}	TLP, $t_p=100ns$, I/O to GND		0.75		Ω
Diode Capacitance ¹	$C_{I/O-I/O}$	Reverse Bias=0V, $f=1$ MHz		0.3	0.45	pF


Note: 1. Parameter is guaranteed by design and/or device characterization.

2 Transmission Line Pulse (TLP) with 100ns width, 2ns rise time, and average window $t_1=70ns$ to $t_2=90ns$


8/20 μs Pulse Waveform

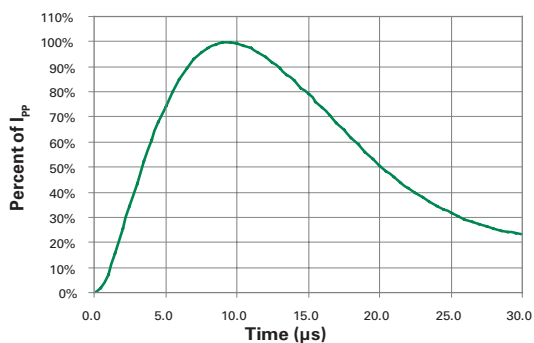


Capacitance vs. Reverse Bias

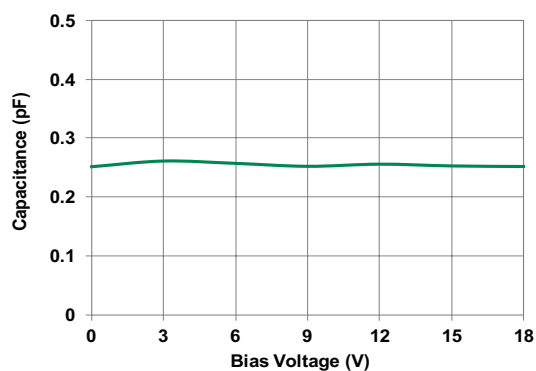

Transmission Line Pulsing (TLP) Plot

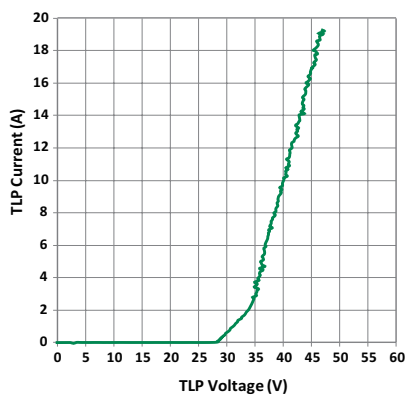


Insertion Loss (S21)

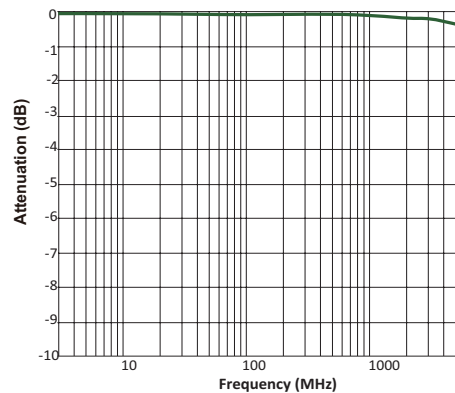


Soldering Parameters


Reflow Condition		Pb – Free assembly
Pre Heat	- Temperature Min ($T_{s(min)}$)	150°C
	- Temperature Max ($T_{s(max)}$)	200°C
	- Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus) Temp (T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Temperature (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260 ^{+0/-5} °C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes Max.
Do not exceed		260°C

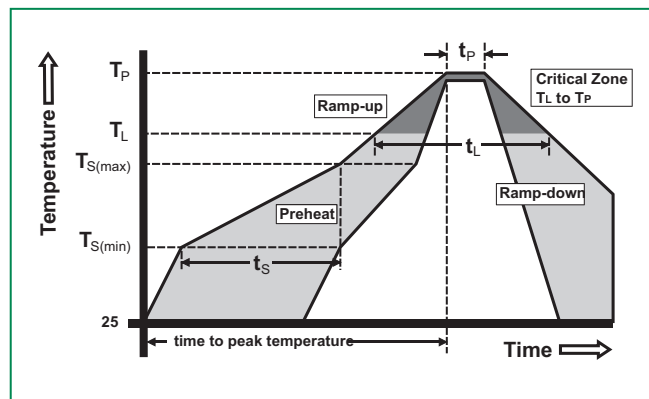

Part Numbering System

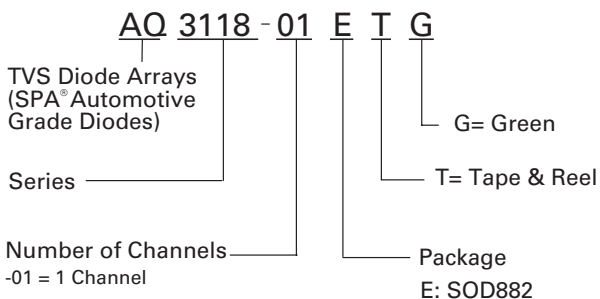

Part Marking System



Product Characteristics


Lead Plating	Pre-Plated Frame
Lead Material	Copper Alloy
Lead Coplanarity	0.004 inches(0.102mm)
Substrate material	Silicon
Body Material	Molded Epoxy
Flammability	UL 94 V-0

- Notes :
1. All dimensions are in millimeters.
 2. Dimensions include solder plating.
 3. Dimensions are exclusive of mold flash & metal burr.
 4. Blo is facing up for mold and facing down for trim/form, i.e. reverse trim/form.
 5. Package surface matte finish VDI 11-13.

Ordering Information


Part Number	Package	Marking	Min. Order Qty.	Packaging Option	P0/P1	Packaging Specification
AQ3118-01ETG	SOD882		10000	Tape & Reel – 8mm tape/7" reel	4mm/2mm	EIA RS-481

Package Dimensions — SOD882

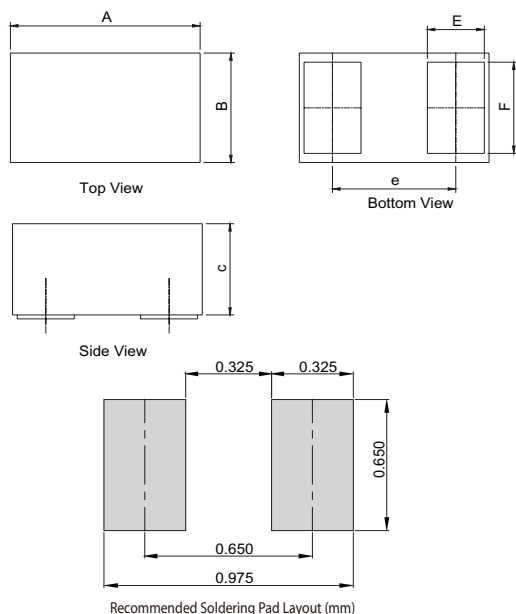


Symbol	Package	SOD882			
	JEDEC	MO-236			
	Millimeters		Inches		
	Min	Max	Min	Max	
A	0.95	1.05	0.037	0.041	
B	0.55	0.65	0.022	0.026	
C	0.45	0.55	0.018	0.022	
E	0.20	0.30	0.008	0.012	
F	0.45	0.55	0.018	0.022	
e	0.65 BSC		0.026 BSC		

Embossed Carrier Tape & Reel Specification — SOD882

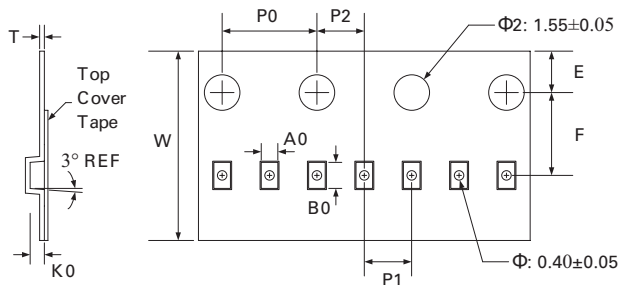

Reel Size 7 Inch

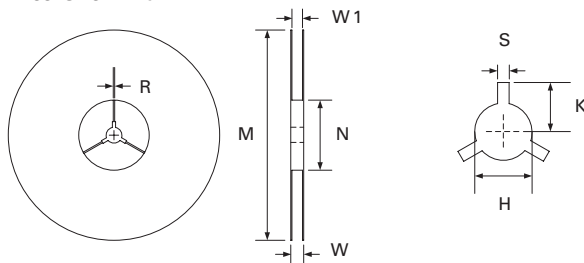

Tape Dimensions		
Symbol	Millimetres	
	Min	Max
A0	0.65	0.75
B0	1.10	1.20
K0	0.50	0.60
E	1.65	1.85
F	3.45	3.55
P0	3.90	4.10
P1	1.90	2.10
P2	1.95	2.05
T	1.95	2.05
W	7.90	8.10

Reel Dimensions (Size $\Phi 178$)		
Symbol	Millimetres	
	Min	Max
M	177.0	179.0
N	59.0	61.0
W	11.0	12.0
W1	8.5	9.5
H	12.5	13.5
S	1.9	2.1
K	10.8	11.2
R	0.95	1.05