

Specification Status: Released

Electrical Rating

Voltage: 99V_{AC} MAX
Current: 20A MAX

Insulating Material:
 None

Lead Material:
 20 AWG Tin Plated Copper

Marking:
 None

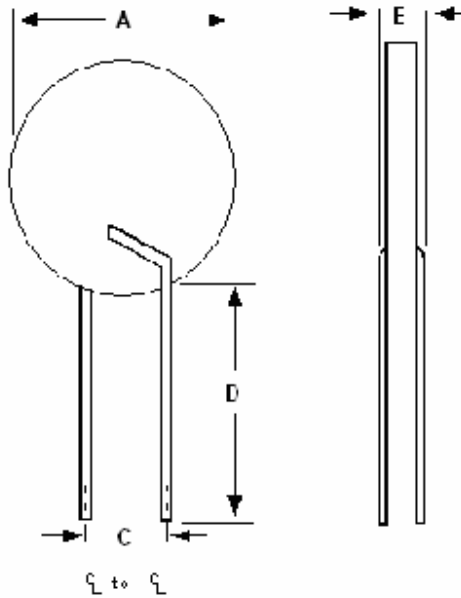


TABLE I. DIMENSIONS:

	A		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	10.2	4.3	5.8	7.6	--	--	3.0
in*:	--	(0.40)	(0.17)	(0.23)	(0.30)	--	--	(0.12)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD	CURRENT RATINGS						TIME TO TRIP	RESISTANCE		ONE-HOUR POST-TRIP RESISTANCE STANDARD TRIP	NOMINAL TRIPPED POWER DISSIPATION	
	AMPS 60°C HOLD	AMPS AT 0°C HOLD	AMPS AT 20°C TRIP	AMPS AT 60°C TRIP	AMPS AT 60°C HOLD	AMPS AT 60°C TRIP		SECONDS AT 20°C, 1.6A MAX	OHMS AT 20°C MIN			OHMS AT 20°C MAX
	0.35	0.65	1.3	0.55	1.1	0.35	0.79	60	0.8	1.30	1.95	2.0

Agency Recognitions:
 Reference Documents:
 Precedence:
 Effectivity:
 CAUTION:

UL, CSA Recognized.
 PS300
 This specification takes precedence over documents referenced herein.
 Reference documents shall be the issue in effect on the date of invitation for bid.
 Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information

ROHS Compliant

ELV Compliant

Pb-Free

Directive 2002/95/EC
 Compliant

Directive 2000/53/EC
 Compliant

