

**Tyco / Electronics**  
**Raychem Circuit Protection**  
 308 Constitution Drive  
 Menlo Park, CA 94025-1164  
 Phone: 800-227-4856  
 Fax: 800-227-4866

**PolySwitch®**  
**PTC Devices**  
 Overcurrent Protection Device

**PRODUCT: LR4-260F**

DOCUMENT: SCD 25973  
 PCN: D03110  
 REV LETTER: A  
 REV DATE: DECEMBER 7, 2004  
 PAGE NO.: 1 OF 1

**Specification Status: Released**

**Electrical Rating**

**Voltage: 15V MAX**  
**Current: 100A MAX**

Chip Size: 5 X 12mm

Leads: Nickel 1/4H  
 0.125mm nominal thickness


Tape: Polyester (White)  
 13mm Width

Solder: Lead-free

Lot Marking Ink Color (Green)

Marking:

— Manufacturer's Mark  
 XX E26 — Part Identification  
 □□□□ — Lot Identification

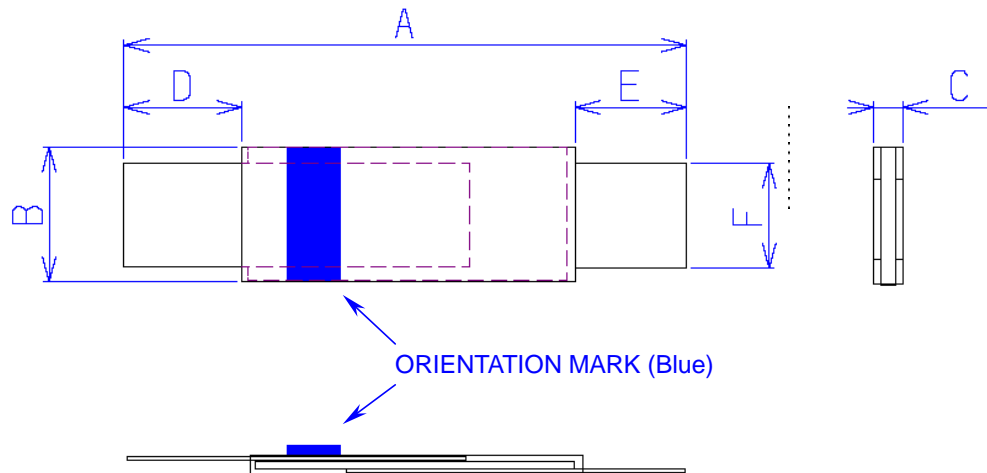

**TABLE I. DIMENSIONS:**

	A		B		C		D		E		F		G	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
Mm:	20.9	23.1	4.9	5.5	0.6	1.0	4.1	5.5	4.1	5.5	3.9	4.1		
In*:	(0.82)	(0.91)	(0.19)	(0.22)	(0.02)	(0.04)	(0.16)	(0.22)	(0.16)	(0.22)	(0.15)	(0.16)		

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS: As measured in Muller Kelvin Clips Model BU-75K.**

I HOLD	CURRENT TRIP LIMITS								TIME TO TRIP		REFERENCE RESISTANCE		ONE-HOUR POST-TRIP RESISTANCE		TRIPPED-STATE POWER DISSIPATION	
AMPS 20°C HOLD	AMPS AT 0°C		AMPS AT 20°C		AMPS AT 60°C		AMPS AT --°C		SECONDS AT 20°C, 13.0A		OHMS AT 20°C		OHMS AT 20°C		WATTS AT 20°C, 15V	
	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	TYP	MAX	MIN	MAX	MIN	MAX	TYP	MAX
2.6	3.1	6.8	2.6	5.8	1.9	4.2	--	--	--	5	0.020	0.042	0.020	0.063	--	2.5

Agency Recognitions:  
 Reference Documents:  
 Precedence:  
 Effectivity:  
 CAUTION:

UL, TUV, CSA  
 PS300  
 This specification takes precedence over documents referenced herein.  
 Reference documents shall be the issue in effect on the date of invitation for bid.  
 Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.