

Specification Status: Released

Maximum Electrical Rating

Operating Voltage: 15Vdc
Interrupt Current: 100A

Chip Size: 5 X 12mm

Leads: Nickel 1/4H
 0.125mm nominal thickness

Solder: Lead-free

Tape: Polyester (White)
 13.0 mm nominal width

Marking: (Color: Green)
 — Manufacturer's Mark

✕ E26 — Part Identification

□□□□ — Lot Identification

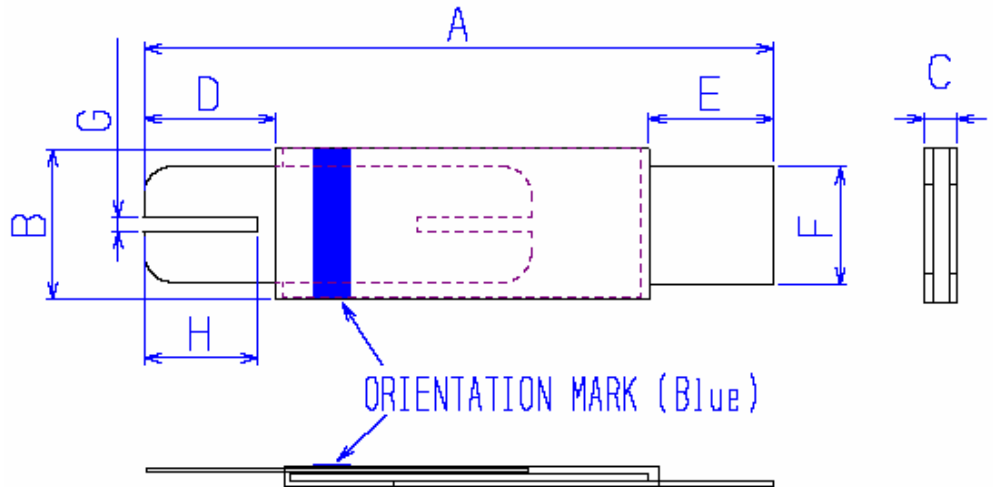


TABLE I. DIMENSIONS:

	A		B		C		D		E		F		G	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	20.9	23.1	4.9	5.5	0.6	1.0	4.1	5.5	4.1	5.5	3.9	4.1	0.3	0.7
in*:	(0.82)	(0.91)	(0.19)	(0.22)	(0.02)	(0.04)	(0.16)	(0.22)	(0.16)	(0.22)	(0.15)	(0.16)	(0.01)	(0.03)

	H	
	MIN	MAX
mm:	3.8	4.2
in*:	(0.15)	(0.17)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS: As measured in Mueller Kelvin Clips model BU-75K.

I HOLD	CURRENT TRIP LIMITS									TIME TO TRIP		REFERENCE RESISTANCE		ONE-HOUR POST-TRIP RESISTANCE		TRIPPED-STATE POWER DISSIPATION						
	AMPS 20°C HOLD			AMPS AT 0°C			AMPS AT 20°C			AMPS AT 60°C			AMPS AT -20°C		SECONDS AT 20°C, 13.0A		OHMS AT 20°C		OHMS AT 20°C		WATTS AT 20°C, 15V MAX	
	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
	2.6	3.1	6.8	2.6	5.8	1.9	4.2	--	--	--	5		0.020	0.042	0.020	0.063	--	--	--	--	2.5	

Agency Recognitions: UL, TUV, CSA
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information:

ROHS Compliant

Directive 2002/95/EC
 Compliant

ELV Compliant

Directive 2000/53/EC
 Compliant

Pb-Free

