

Tyco / Electronics
Raychem Circuit Protection
 308 Constitution Drive
 Menlo Park, CA 94025-1164
 Phone: 800-227-4856
 Fax: 800-227-4866

PolySwitch®
PTC Devices
 Overcurrent Protection Device

PRODUCT: VLR230F

DOCUMENT: SCD 25580
 PCN: D03587
 REV LETTER: B
 REV DATE: FEBRUARY 17, 2005
 PAGE NO.: 1 OF 1

Specification Status: Released

Maximum Electrical Rating

Operating Voltage: 12Vdc
Interrupt Current: 100A

Chip Size: 5 X 12mm

Leads: Nickel 1/4H
 0.125mm nominal thickness

Solder: Lead-free

Tape: Polyester (White)
 13 mm nominal width

Marking: (Color: Green)
 — Manufacturer's Mark
XX R23 — Part Identification
 □□□□ — Lot Identification

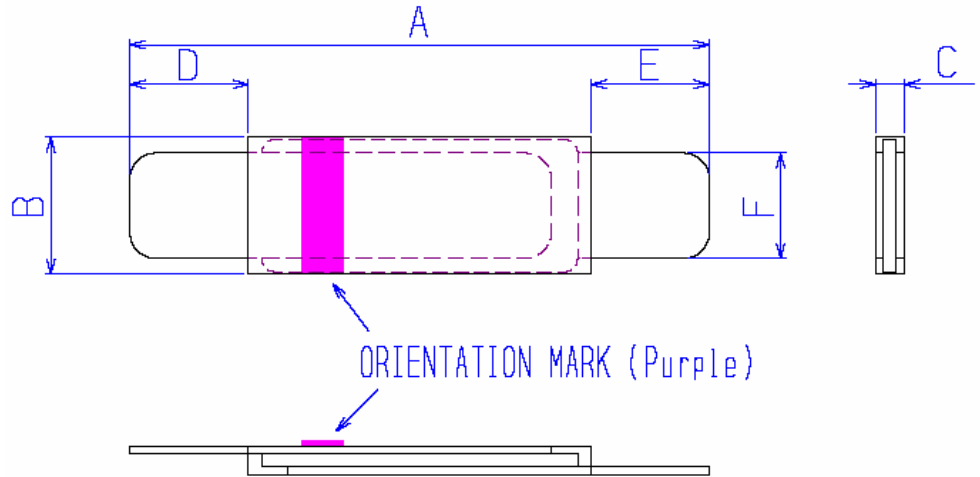


TABLE I. DIMENSIONS:

	A		B		C		D		E		F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	20.9	23.1	4.9	5.3	---	0.8	4.1	5.8	4.1	5.8	3.9	4.1
in*:	(0.82)	(0.91)	(0.19)	(0.21)	--	(0.03)	(0.16)	(0.23)	(0.16)	(0.23)	(0.15)	(0.16)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS: As measured in Mueller Kelvin Clips model BU-75K.

I HOLD	CURRENT TRIP LIMITS									TIME TO TRIP	REFERENCE RESISTANCE	ONE-HOUR POST-TRIP RESISTANCE	TRIPPED-STATE POWER DISSIPATION					
	AMPS AT 0°C		AMPS AT 25°C		AMPS AT 60°C		AMPS AT --°C		SECONDS AT 25°C, 10.0A					OHMS AT 25°C		WATTS AT 25°C, 12V		
HOLD	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	TYP	MAX	MIN	MAX	TYP	MAX	TYP	MAX
2.3	3.4	6.6	2.3	5.0	0.9	2.3	---	---	2.4	5	0.012	0.018	0.031	0.036	1.4	2.5		

Agency Recognitions: UL, TUV, CSA
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information:

ROHS Compliant

Directive 2002/95/EC
 Compliant

ELV Compliant

Directive 2000/53/EC
 Compliant

Pb-Free

