

Specification Status: Released

Maximum Electrical Rating

Operating Voltage: 12Vdc
Interrupt Current: 100A

Chip Size: 5 X 12mm

Leads: Nickel 1/4H
 0.125mm nominal thickness

Solder: Lead-free

Tape: None

Marking: None

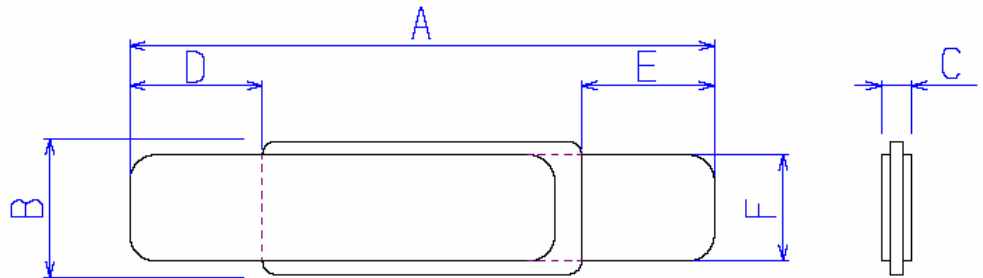


TABLE I. DIMENSIONS:

	A		B		C		D		E		F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	20.9	23.1	4.9	5.1	---	0.7	4.1	6.0	4.1	6.0	3.9	4.1
in*:	(0.82)	(0.91)	(0.19)	(0.20)	--	(0.03)	(0.16)	(0.24)	(0.16)	(0.24)	(0.15)	(0.16)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS: As measured in Mueller Kelvin Clips model BU-75K.

I HOLD	CURRENT TRIP LIMITS									TIME TO TRIP	REFERENCE RESISTANCE	ONE-HOUR POST-TRIP RESISTANCE	TRIPPED-STATE POWER DISSIPATION			
	AMPS AT 0°C			AMPS AT 25°C		AMPS AT 60°C		AMPS AT -°C						SECONDS AT 25°C, 10.0A	OHMS AT 25°C	
HOLD	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	TYP	MAX	MIN	MAX	TYP	MAX
2.3	3.4	6.6	2.3	5.0	0.9	2.3	---	---	2.4	5	0.012	0.018	0.031	0.036	1.4	2.5

Agency Recognitions:
 Reference Documents:
 Precedence:
 Effectivity:
 CAUTION:

UL, TUV, CSA
 PS300
 This specification takes precedence over documents referenced herein.
 Reference documents shall be the issue in effect on the date of invitation for bid.
 Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information:

ROHS Compliant

Directive 2002/95/EC
 Compliant

ELV Compliant

Directive 2000/53/EC
 Compliant

Pb-Free

