

Single Channel Silicon ESD Protector Overvoltage Protection Device

308 Constitution Drive
Menlo Park, CA USA
www.circuitprotection.com

DOCUMENT: SCD28187
REV LETTER: G
REV DATE: MAY 15, 2013
PAGE NO.: 1 OF 6

Specification Status: RELEASED

BENEFITS

- Industry-leading lowest capacitance; provides lowest insertion loss for high speed data signals
- Small size ESD protection diodes for high speed data signals (0402 size devices)
- Helps protect electronic circuits against damage from Electrostatic Discharge (ESD), surge and cable discharge events
- Assists equipment to pass IEC61000-4-2, level 4 testing

FEATURES

- Low capacitance: 0.10 pF (100fF) (typ)
- Low leakage current: 25nA @ 5V (typ)
- Low clamping voltage: +10.0 / -10.0V (typ) @ (tp=8x20µs, Ipp=2A)
- ESD maximum rating per IEC61000-4-2 standard:
 - 20kV contact discharge
 - 20kV air discharge
- Surge: 2A (max) @ (tp=8x20µs) per IEC61000-4-5
- Small size and low profile: XDFN packages
- Bi-directional operation



APPLICATIONS

- Consumer, mobile and portable electronics
- Tablet PC and external storage with high speed interfaces
- Ultra-high speed data lines
- USB 3.0/2.0, HDMI 1.3/1.4, DisplayPort, Thunderbolt (Light Peak), V-by-One HS, and LVDS interfaces
- Applications requiring high ESD performance in small packages

AEC-Q101 QUALIFIED


MATERIALS INFORMATION

RoHS Compliant
ELV Compliant
Halogen Free * Lead Free


Directive 2000/53/EC Compliant
Directive 2002/95/EC Compliant
HF
Pb

* Halogen Free refers to: Br≤900ppm, Cl≤900ppm, Br+Cl≤1500ppm
 SESD devices meet MSL-1 Requirements
 DFN case epoxy meets UL 94 V-0


PART NUMBERING

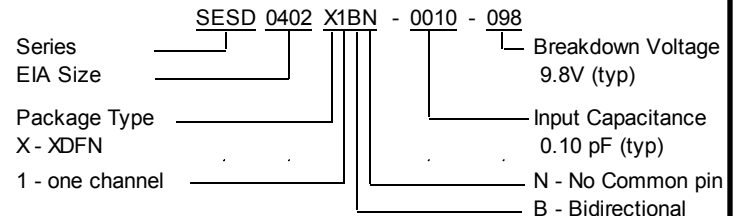

PART MARKING



PIN CONFIGURATION AND SCHEMATIC

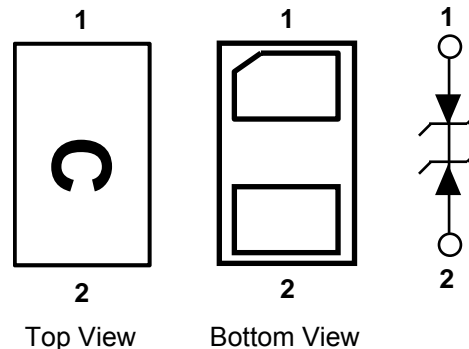

* Drawing not to scale

Single Channel Silicon ESD Protector Overvoltage Protection Device

DEVICE MAXIMUM RATING

ESD Withstand ⁽¹⁾ (IEC 61000-4-2, level 4)		Temperature		Peak Current (tp=8x20µs)
Contact (kV)	Air (kV)	Operating (°C)	Storage (°C)	I _{pp} (A)
20	20	-55 to +125	-55 to +150	2.0

⁽¹⁾ 20kV @ 1 pulse; 10kV @ 100 pulses; 8kV @ 1,000 pulses (under IEC6100-4-2)


- Maximum leakage current post 15kV & 20kV pulses is less than 1 µA
- Device maximum rating @ T = 25°C, unless otherwise specified
- Caution: Stress exceeding Device Maximum Ratings may damage the device
Prolonged exposure to stresses above the recommended operating conditions may affect device reliability

DEVICE ELECTRICAL CHARACTERISTICS

Input Capacitance @ V _R = 0V, f = 3GHz (pF)		Breakdown Voltage V _{BR} @ I _T =1mA (V)	Reverse Working Voltage (V)		Reverse Leakage Current I _L @ V _{RWM} =5.0V (nA)		Clamping Voltage V _{CL} @ I _{pp} =2.0A (V)
Typ	Maximum	Typ	Min	Max	Typ	Max	Typ
0.10	0.13	+9.80 / -9.80	-7.00	+7.00	25.0	50.0	+10.0 / -10.0

- All device electrical characteristics @ T = 25°C, unless otherwise specified

FIGURE 1. INSERTION LOSS DIAGRAM

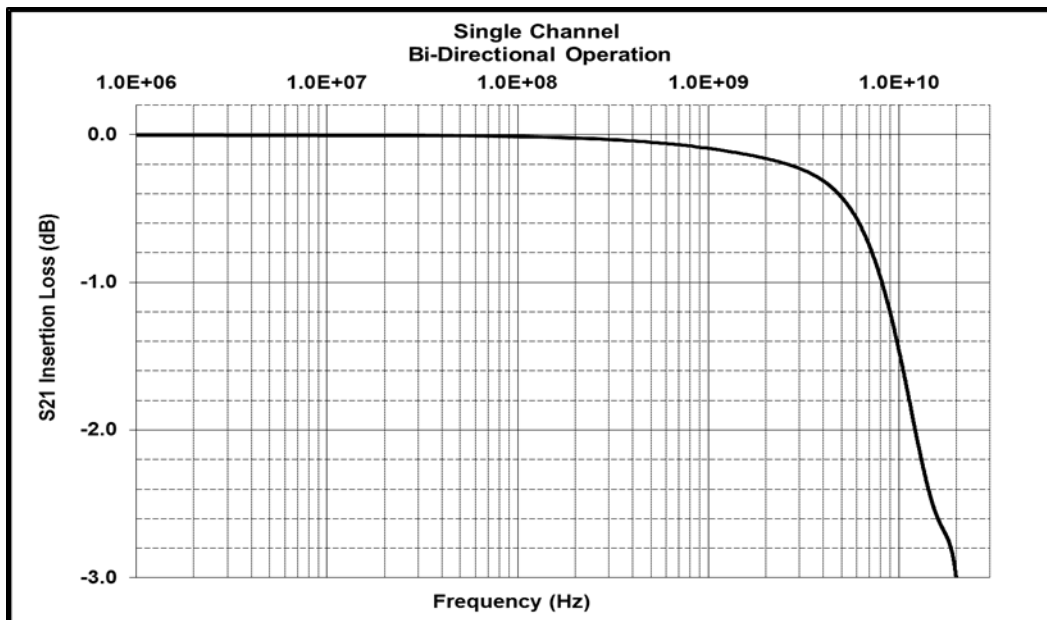


Application	Bit Rate (Gbps)	@ Freq (GHz)	Ins. Loss (dB)
HDMI 1.4 (1080P)	2.25	1.13	-0.11
DisplayPort	2.70	1.35	-0.12
HDMI 1.4 (4K / QuadHD)*	3.40	1.70	-0.15
USB3.0	5.00	2.50	-0.20
eSATA	6.00	3.00	-0.24
Thunderbolt	10.0	5.00	-0.39


*HDMI 4K / QuadHD resolutions (4096 x 2160) ready

Single Channel Silicon ESD Protector Overvoltage Protection Device

FIGURE 2. DEVICE IV CURVE

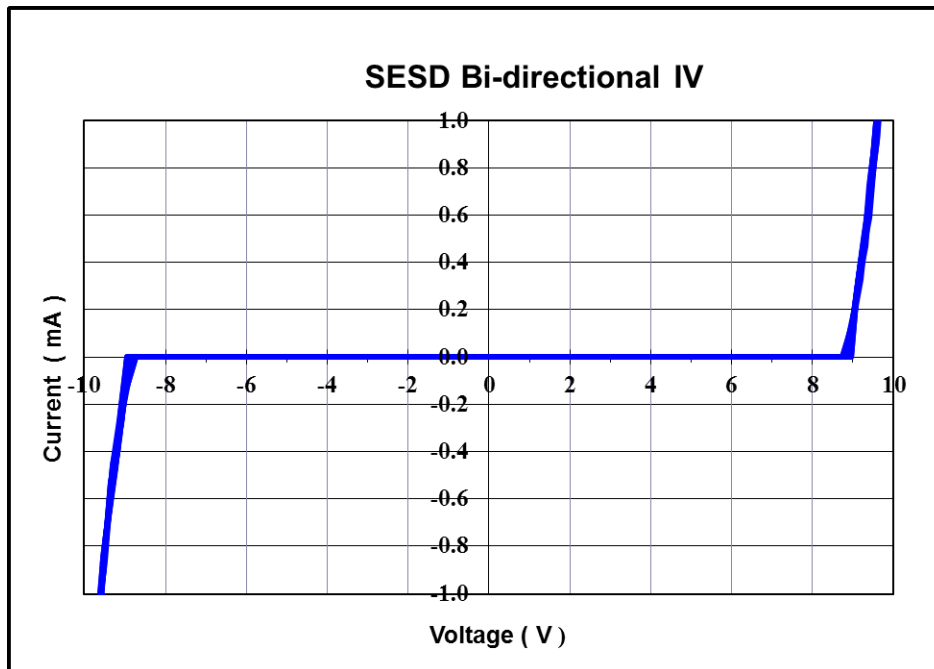

DEVICE DIMENSIONS

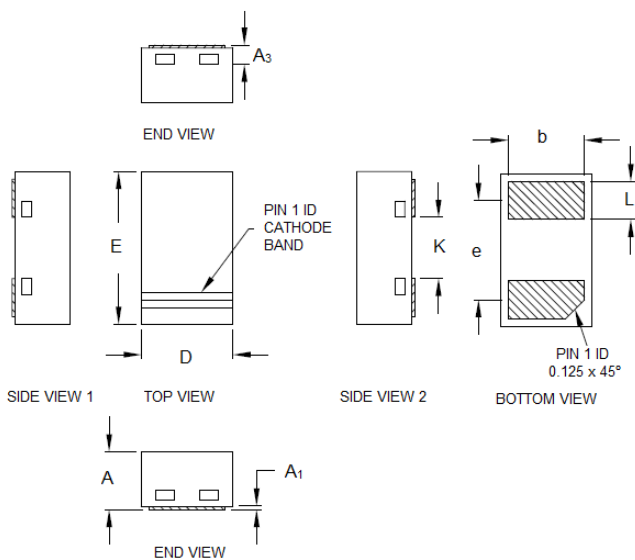

Dim	SESD0402X1BN-0010-098			Millimeters (mm)			Inches (in)		
	Min	Nom	Max	Min	Nom	Max	Min	Nom	Max
A	0.33	0.38	0.43	0.013	0.015	0.017			
A1	0	-	0.05	0	-	0.002			
A3	0.13 ref.			0.005 ref.					
D	0.55	0.60	0.65	0.022	0.024	0.026			
E	0.95	1.00	1.05	0.037	0.039	0.041			
K	0.35	0.40	0.45	0.014	0.016	0.018			
b	0.45	0.50	0.55	0.018	0.020	0.022			
L	0.20	0.25	0.30	0.008	0.010	0.012			
e	0.65 BSC			0.026 BSC					


BSC – Basic Spacing between Centers

**Single Channel
Silicon ESD Protector
Overvoltage Protection Device**

308 Constitution Drive
Menlo Park, CA USA
www.circuitprotection.com

DOCUMENT: SCD28187
REV LETTER: G
REV DATE: MAY 15, 2013
PAGE NO.: 4 OF 6

RECOMMENDED LANDING PATTERN:

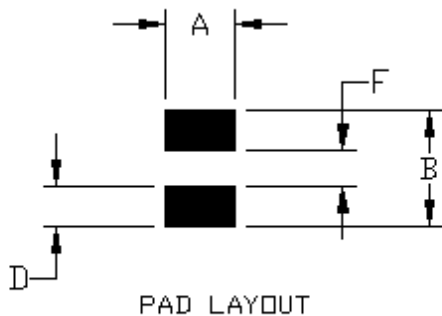


SESD Landing Pad Layout 0402 Package		
Symbol	Milimeters (mm)	Inches (in)
A	0.60	0.024
B	1.00	0.039
D	0.35	0.014
F	0.30	0.012

PACKAGING

Packaging	Tape & Reel	Standard Box
SESD0402X1BN-0010-098	10,000	50,000

REEL DIMENSIONS

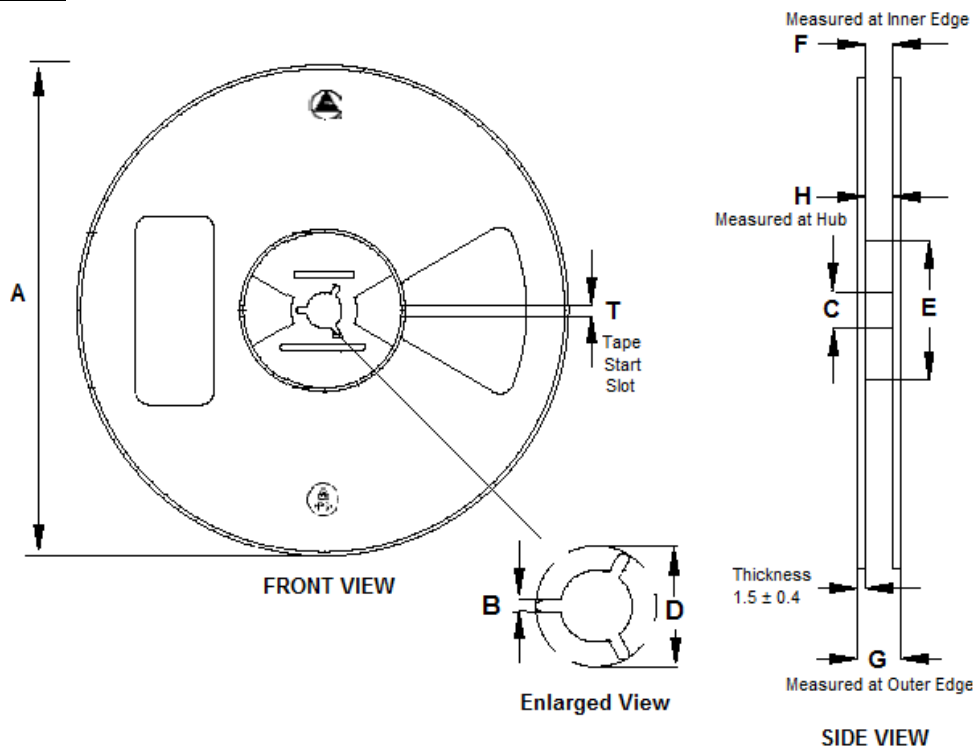


Dimensions	A	B	C	D	E	F	G	H
(mm)	180 ± 2.00	1.50 (min)	13.10 ± 0.20	20.20 (min)	60 ± 1.00	8.75 ± 1.00	11.6 ± 1.00	9.4 (max)

Single Channel Silicon ESD Protector Overvoltage Protection Device

308 Constitution Drive
Menlo Park, CA USA
www.circuitprotection.com

DOCUMENT: SCD28187
REV LETTER: G
REV DATE: MAY 15, 2013
PAGE NO.: 5 OF 6

CARRIER TAPE DIMENSIONS

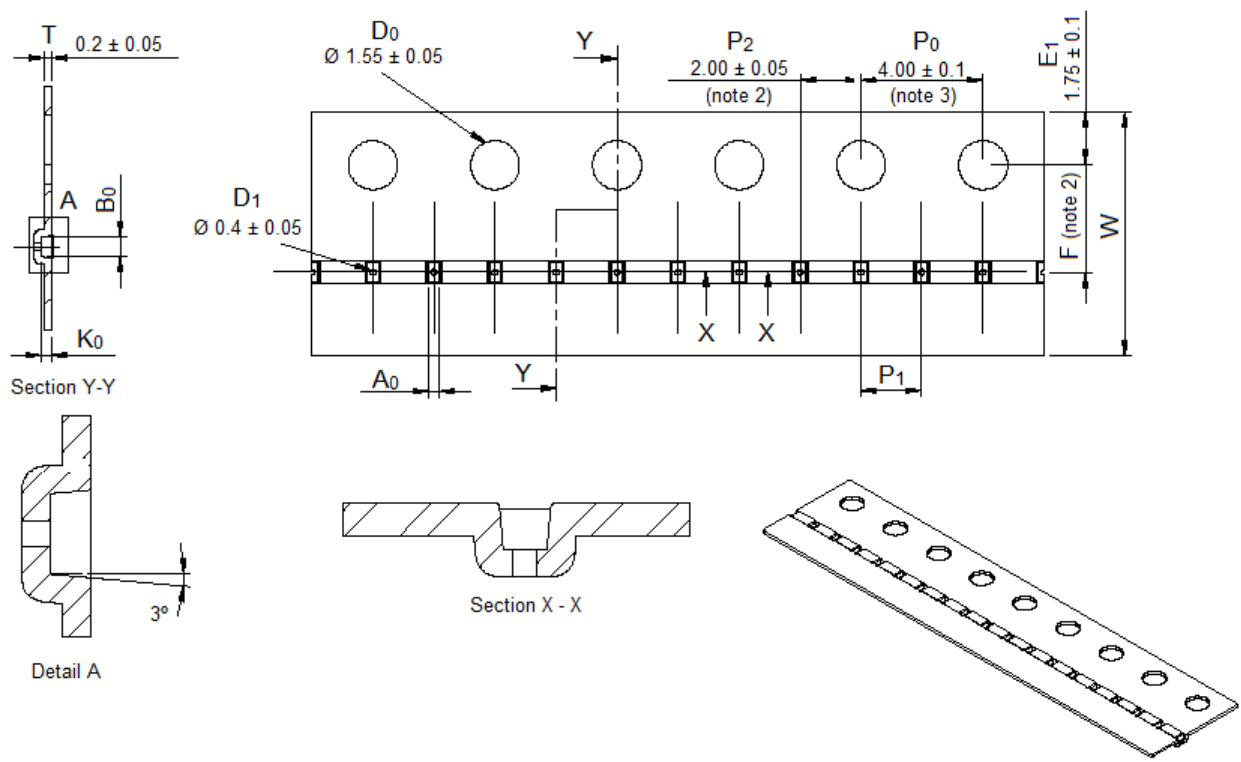

A ₀	0.70 ± 0.05
B ₀	1.15 ± 0.05
K ₀	0.47 ± 0.05
F	3.50 ± 0.05
P ₁	2.00 ± 0.10
W	8.00 ± 0.10

Note 1. All dimensions in mm
 Note 2. Measured from centerline of pocket to centerline of sprocket hole
 Note 3. Cumulative tolerance of 20 sprocket holes is ± 0.20
 Note 4. Tolerances unless noted ± 0.20

Single Channel Silicon ESD Protector Overvoltage Protection Device


308 Constitution Drive
Menlo Park, CA USA
www.circuitprotection.com

DOCUMENT: SCD28187
REV LETTER: G
REV DATE: MAY 15, 2013
PAGE NO.: 6 OF 6

SOLDER REFLOW RECOMMENDATION

A	Temperature ramp up 1	From ambient to Preheating temperature	30s to 60s
B	Preheating	140°C - 160°C	60s to 120s
C	Temperature ramp up 2	From Preheating to Main heating temperature	20s to 40s
D	Main heating	at 200°C at 220°C at 240°C at 260°C	60s ~ 70s 50s ~ 60s 30s ~ 40s 5s ~ 10s
E	Cooling	From main heating temperature to 100°C	4°C/s (max)

FIGURE 3. REFLOW PROFILE

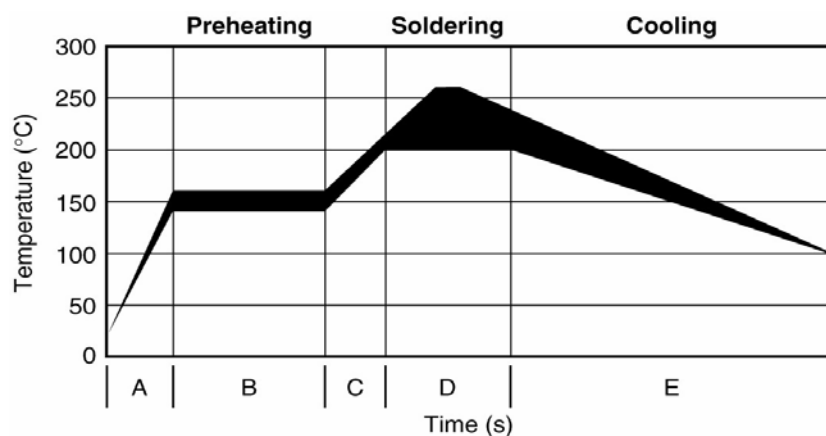

All information, including illustrations, is believed to be accurate and reliable. Users, however, should independently evaluate the suitability of and test each product selected for their application. Tyco Electronics Corporation and/or its Affiliates in the TE Connectivity Ltd. family of companies ("TE") makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. TE's only obligations are those in the TE Standard Terms and Conditions of Sale and in no case will TE be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products. Specifications are subject to change without notice. In addition, TE reserves the right to make changes to materials or processing that do not affect compliance with any applicable specification without notification to Buyer. Without expressed written consent by an officer of TE, TE does not authorize the use of any of its products as components in nuclear facility applications, aerospace, or in critical life support devices or systems.

TE Connectivity, TE Connectivity (logo), and TE (logo) are trademarks.

Other logos, products and /or company names might be trademarks of their respective owners.