



Specification Status: Released

Max Electrical Rating at 20°C

Operating Voltage: 60V_{DC}
Fault Voltage: 250V_{RMS}
Interrupt Current: 3A_{RMS}

Lead Material :
 22 AWG Sn plated copper

Raychem Logo
 20 — Part Identification
 — Lot Identification
 Marking:

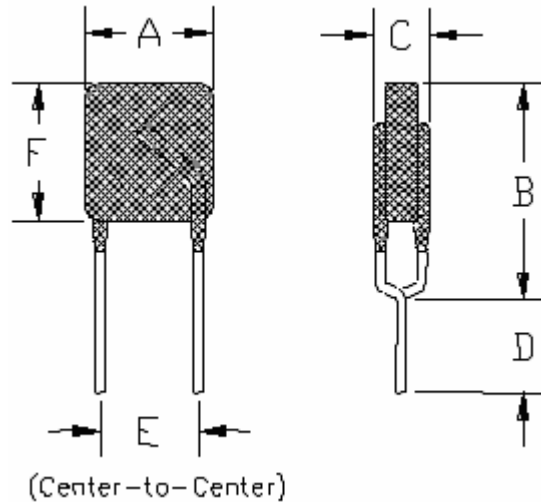


TABLE I. DIMENSIONS:

	A		B		C		D		E	F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	NOM	MIN	MAX
mm:	--	6.5	--	11.0	--	4.6	4.7	--	5.0	--	7.0
in:	--	(0.256)	--	(0.433)	--	(0.180)	(0.185)	--	(0.197)	--	(0.276)

TABLE II. PERFORMANCE RATINGS @ 20°C (unless otherwise noted):

IHOLD (A)	RESISTANCE (Ω)			TIME TO TRIP (s) @ 1A TYP	OPERATING TEMPERATURE (°C)	
	R MIN	R MAX	R _{1 MAX} *		MIN	MAX
20°C	6.0	10.5	16.0	0.9	-40	85

*Maximum device resistance at 20°C measured 1 hour post trip.

Additional Ratings @ 20°C
 Resistance Matched 0.5 Ohm
 Lightning Withstand ITU AT 1.5kV

Agency Recognitions: UL, CSA, TUV pending
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information

ROHS Compliant

ELV Compliant

Pb-Free

Directive 2002/95/EC
 Compliant

Directive 2000/53/EC
 Compliant

