

Raychem Corporation

300 Constitution Drive
Menlo Park, CA 94025
800-227-4856
FAX 800-227-4866



PolySwitch® PTC Devices Resettable Fuse

PRODUCT: RGE600K

DOCUMENT: SCD 23912
PCN: 322631
REV LETTER: D
REV DATE: FEBRUARY 5, 2000
PAGE NO.: 1 OF 1

Specification Status: RELEASED

Electrical Rating

Voltage: 16V MAX
Current: 100A MAX

Insulating Material:

Cured, Flame Retarded Epoxy Polymer
meets UL94 V-0 Requirements

Lead Material:

20 AWG Tin/Lead Plated Copper
(0.81mm [0.032] nom. diameter)

Marking:

Raychem Logo and Voltage
 XX 16
 G 600 — Part Identification
 □□□□ — Lot Identification (can be on back)

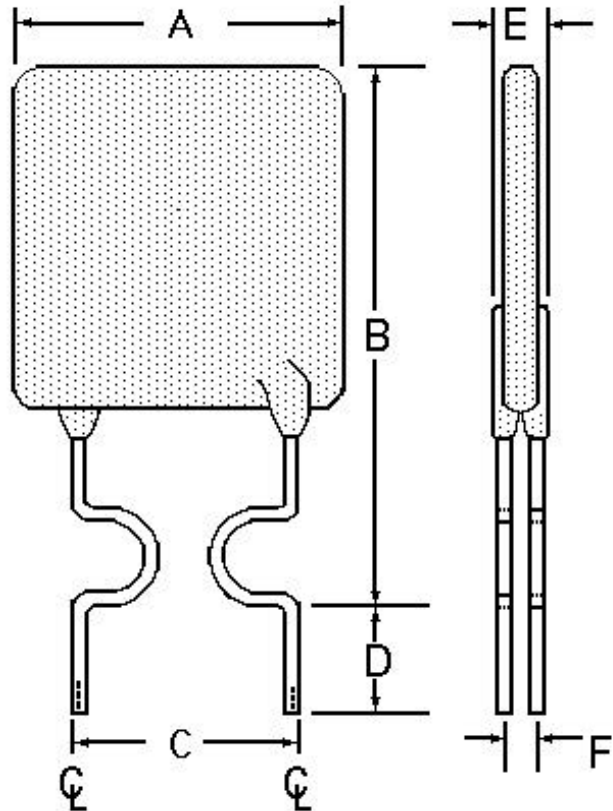


TABLE I. DIMENSIONS:

	A		B		C		D		E		F
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	TYP
mm:	9.7	10.7	-	19.7	4.3	5.8	7.6	-	2.0	3.0	1.2
in*:	(0.38)	(0.42)	-	(0.78)	(0.17)	(0.23)	(0.3)	-	(0.08)	(0.12)	(0.05)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD	CURRENT RATINGS		TIME TO TRIP	RESISTANCE		TRIPPED-STATE POWER DISSIPATION
	AMPS HOLD	AMPS AT 25°C TRIP		OHMS AT 25°C MIN	OHMS AT 25°C MAX	
6.0	6.0	10.2	SECONDS AT 25°C, 30 A MAX	3.3	0.010 0.028	WATTS AT 25°C, 16V TYP
						2.8

Recognitions:

CSA/ TUV/ UL approved.

Reference Documents:

PS300

Precedence:

This specification takes precedence over documents referenced herein.

Effectivity:

Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Raychem Corporation

300 Constitution Drive
Menlo Park, CA 94025
800-227-4856
FAX 800-227-4866

R
PolySwitch®
PTC Devices
Resettable Fuse

PRODUCT: RGE600K

DOCUMENT: SCD 23912
PCN: 322631
REV LETTER: D
REV DATE: FEBRUARY 5, 2000
PAGE NO.: 2 OF 1
