

# Raychem Corporation

300 Constitution Drive  
Menlo Park, CA 94025  
800-227-4856  
FAX 800-227-4866



## PolySwitch® PTC Devices Resettable Fuse

PRODUCT: RGE800K

DOCUMENT: SCD 24096  
PCN: 706609  
REV LETTER: D  
REV DATE: FEBRUARY 03, 2000  
PAGE NO.: 1 OF 1

### Specification Status: RELEASED

#### Electrical Rating

Voltage: 16V MAX

Current: 100A MAX

#### Insulating Material:

Cured, Flame Retarded Epoxy Polymer  
meets UL94 V-0 Requirements

#### Lead Material:

20 AWG Tin/Lead Plated Copper  
(0.81mm [0.032] nom. diameter)

#### Marking:

- Raychem Logo and Voltage
- Part Identification
- Lot Identification (can be on back)

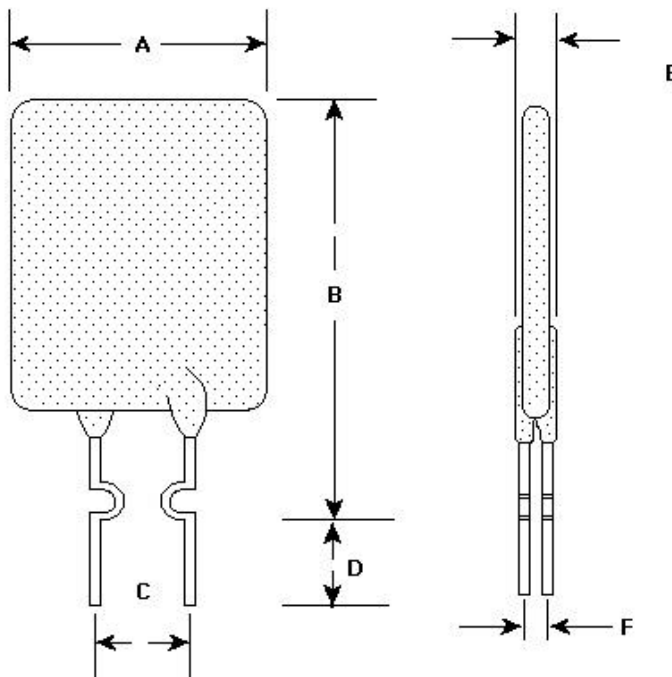


TABLE I. DIMENSIONS:

	A		B		C		D		E		F
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	TYP
mm:	11.7	12.7	-	23.5	4.3	5.8	7.6	--	2.0	3.0	1.2
in*:	(0.46)	(0.50)	-	(0.93)	(0.17)	(0.23)	(0.30)	--	(0.08)	(0.12)	(0.05)

\*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD	CURRENT RATINGS		TIME TO TRIP	RESISTANCE		TRIPPED-STATE POWER DISSIPATION
	AMPS AT 25°C HOLD	AMPS AT 25°C TRIP		OHMS AT 25°C MIN	OHMS AT 25°C MAX	
8.0	8.0	13.6	5.0	0.0056	0.0175	3.0

Recognitions:

CSA/ TUV/ UL approved.

Reference Documents:

PS300

Precedence:

This specification takes precedence over documents referenced herein.

Effectivity:

Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.