

Specification Status: Released

Electrical Rating

Voltage: 60V MAX
Current: 40A MAX

Insulating Material:
Cured, Flame Retardant Epoxy Polymer

Lead Material:
24 AWG Tin Plated Copper

Marking:

- Manufacturer's Mark and Voltage
- ⊗ 60
- KF075 — Part Identification
- □ □ □ — Lot Identification (can be on back)

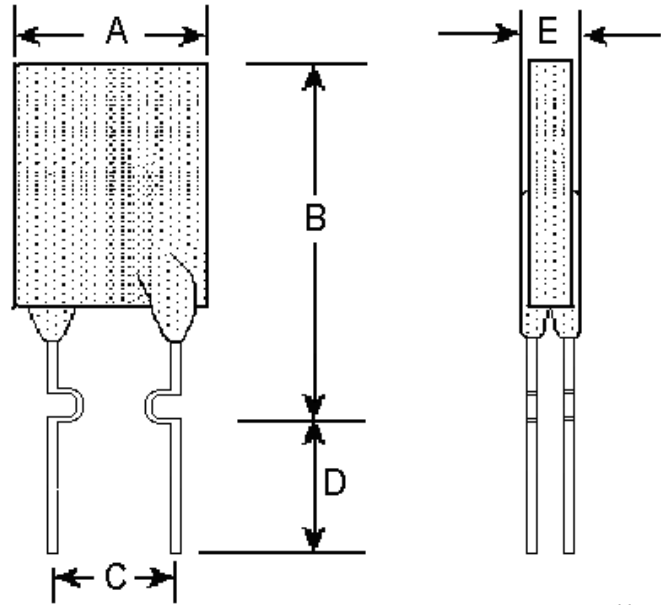


TABLE I. DIMENSIONS:

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	7.87	---	12.2	4.32	5.84	7.6	---	---	3.56
in*:	--	(0.31)	---	(0.48)	(0.17)	(0.23)	(0.3)	---	---	(0.14)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	ONE HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED-STATE POWER DISSIPATION
AMPERES AT 20°C	AMPERES AT 20°C		OHMS AT 20°C		SECONDS AT 20°C, 8 A	OHMS AT 20°C	WATTS AT 20°C
HOLD	HOLD	TRIP	MIN	MAX	MAX	MAX	NOMINAL
0.75	0.75	1.50	0.20	0.39	1.5	0.64	1.4

Agency Recognitions: UL, TUV

Reference Documents: PS300

Precedence: This specification takes precedence over documents referenced herein.

Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information

ROHS Compliant

ELV Compliant

Pb-Free

Directive 2002/95/EC Compliant

Directive 2000/53/EC Compliant

