

Specification Status: RELEASED

Electrical Rating

Voltage: 33V MAX
Current: 40A MAX




Insulating Material:

Cured, Flame Retarded Epoxy Polymer
 meets UL94 V-0 Requirements

Lead Material:

24 AWG Tin/Lead Plated Copper Clad Steel

Marking:

-  Raychem Logo and Voltage
-  Part Identification
-  Lot Identification (can be on back)

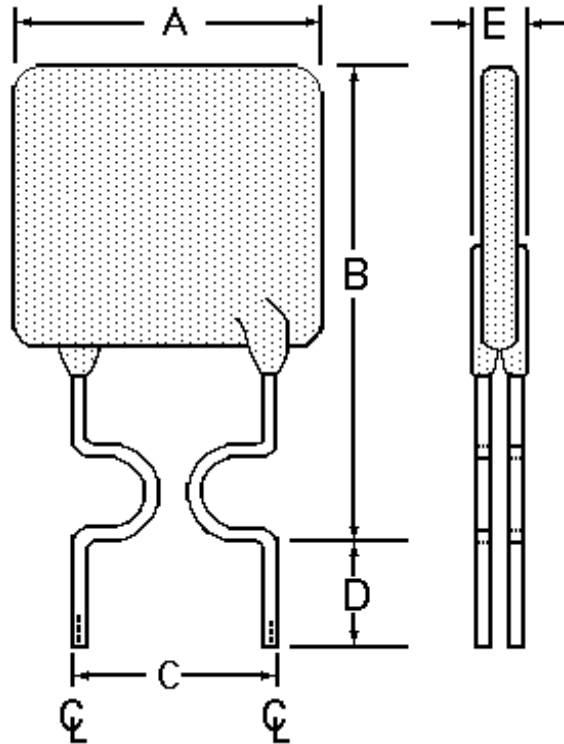


TABLE I. DIMENSIONS:

	A		B		C		D		E		F
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	TYP
mm:	--	7.4	--	14.2	4.3	5.8	7.6	--	--	3.0	--
in*:	--	(0.29)	--	(0.56)	(0.17)	(0.23)	(0.30)	--	--	(0.12)	--

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD*	RATINGS		TIME TO TRIP*	RESISTANCE		ONE-HOUR POST-TRIP RESISTANCE STANDARD TRIP	NOMINAL TRIPPED POWER DISSIPATION*
	AMPS AT 20°C HOLD	AMPS AT 20°C TRIP		OHMS AT 20°C MIN	OHMS AT 20°C MAX		
1.35	1.35	2.5	4.5	0.059	0.100	0.143	0.84

* Values specified were determined using PCB's w/ 0.050 x 1oz Cu traces

Recognitions:

UL, CSA, TUV recognized.

Reference Documents:

PS300

Precedence:

This specification takes precedence over documents referenced herein.

Effectivity:

Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.