

Tyco/Electronics
Raychem Circuit Protection
 308 Constitution Drive
 Menlo Park, CA 94025
 800-227-4856
 FAX 800-227-4866

PolySwitch®
PTC Devices
 Overcurrent Protection Device

PRODUCT: RUE800K

DOCUMENT: SCD 23569
 PCN: 395681
 REV LETTER: E
 REV DATE: SEPTEMBER 30, 2002
 PAGE NO.: 1 OF 1

Specification Status: RELEASED

Electrical Rating

Voltage: 30V MAX
Current: 40A MAX

Insulating Material:
 Cured, Flame Retardant Epoxy Polymer
 meets UL94 V-0 Requirements

Lead Material:
 20 AWG Tin/Lead Plated Copper

Marking:

- Raychem Logo and Voltage
- XX 30
- U800 — Part Identification
- — Lot Identification (can be on back)

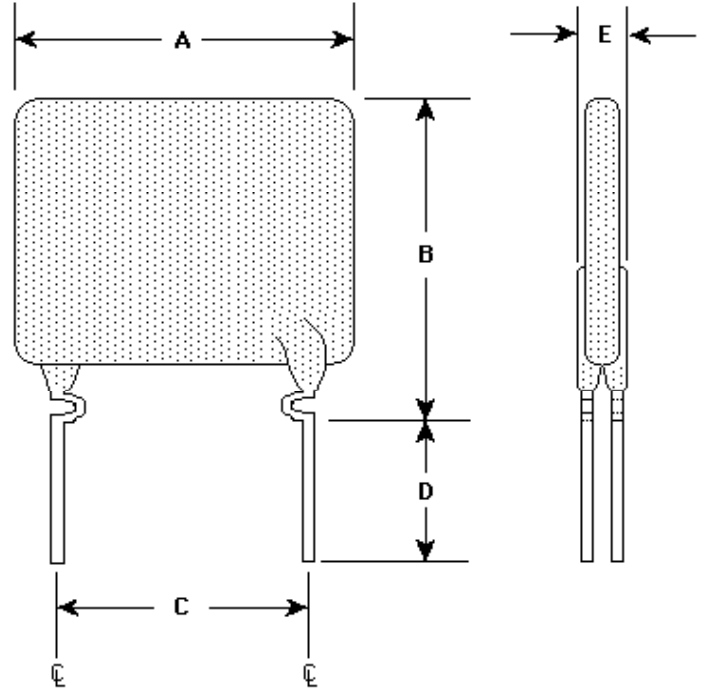


TABLE I. DIMENSIONS:

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	21.6	--	30.2	9.4	10.9	7.6	--	--	3.0
in*:	--	(0.85)	--	(1.19)	(0.37)	(0.43)	(0.30)	--	--	(0.12)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD	CURRENT RATINGS						TIME TO TRIP	RESISTANCE		ONE-HOUR POST-TRIP RESISTANCE STANDARD TRIP	NOMINAL TRIPPED POWER DISSIPATION	
	AMPS 20°C HOLD		AMPS AT 0°C AT 20°C		AMPS AT 60°C			OHMS AT 20°C				
	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	SECONDS AT 20°C, 40A MAX	MIN	MAX	OHMS AT 20°C MAX	WATTS AT 20°C	
	8.00	9.20	18.40	8.00	16.00	5.44	10.88	18.8	0.005	0.02	0.2	4.0

Recognitions: UL, CSA, TUV recognized.
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame