

Tyco / Electronics
Raychem Circuit Protection
 308 Constitution Drive
 Menlo Park, CA 94025-1164
 Phone: 800-227-4856
 Fax: 800-227-4866

PolySwitch®
PTC Devices
 Overcurrent Protection Device

PRODUCT: TR250-110U

DOCUMENT: SCD 23687
 PCN: 415753
 REV LETTER: G
 REV DATE: JANUARY 26, 2004
 PAGE NO.: 1 OF 1

Specification Status: RELEASED

Max Electrical Rating at 20°C

Operating Voltage: 60V_{DC}
Fault Voltage: 250V_{RMS}
Interrupt Current: 3A_{RMS}

Lead Material: 22 AWG Sn/Pb plated
 copper

Marking: None

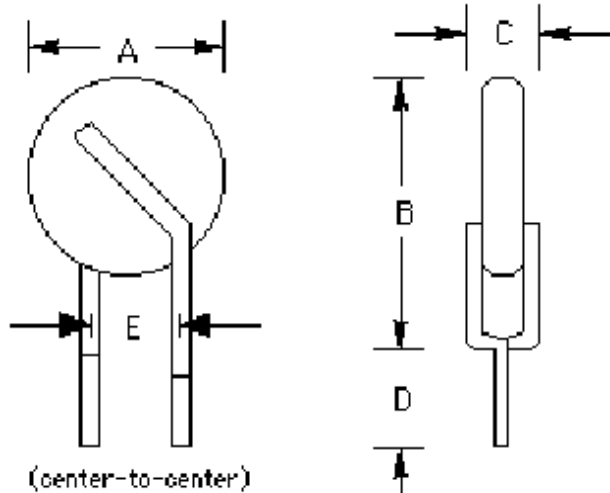


TABLE I. DIMENSIONS:

	A		B		C		D	E
	MIN	MAX	MIN	MAX	MIN	MAX	NOM	NOM
mm:	--	5.33	--	9.4	--	3.8	4.7	5.0
in:	--	(0.210)	--	(0.370)	--	(0.150)	(0.185)	(0.197)

TABLE II. PERFORMANCE RATINGS @ 20°C (unless otherwise noted):

IHOLD (A)	RESISTANCE (Ω)			TIME TO TRIP @ 1A (s)	OPERATING TEMPERATURE (°C)	
	R MIN	R MAX	R _{1,MAX} *		MIN	MAX
20°C				TYP		
0.110	5.0	9.0	16.0	0.75	-40	85

*Maximum device resistance at 20°C measured 1 hour post trip.

Additional Ratings @ 20°C

Lightning Withstand: ITU at 1.5kV

Agency Recognition: UL, CSA, TUV
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.