


Specification Status: RESTRICTED

Max Electrical Rating at 20°C

Operating Voltage: 60V_{DC}
Fault Voltage: 250V_{RMS}
Interrupt Current: 10A_{RMS}

Lead Material :
 22 AWG Sn/Pb plated copper

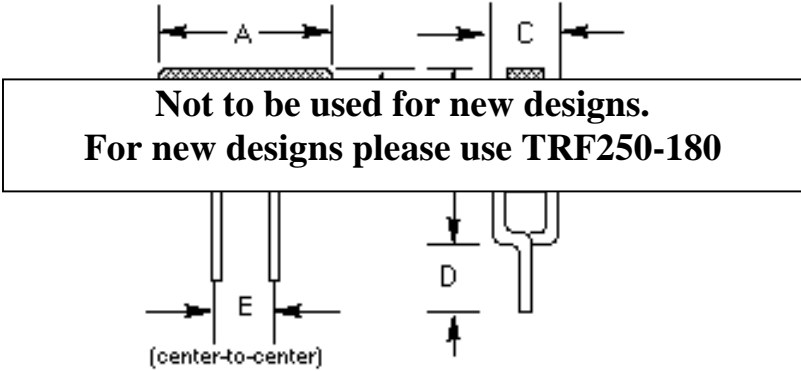

Marking:

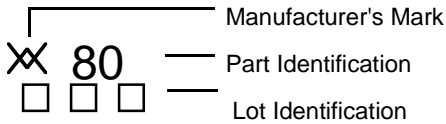


TABLE I. DIMENSIONS:

	A		B		C		D		E	F	
	Min	Max	Min	Max	Min	Max	Min	Max	Nom	Min	Max
mm:	--	10.4	--	12.6	--	3.8	4.7	--	5.0	--	6.6
in:	--	(0.410)	--	(0.496)	--	(0.150)	(0.185)	--	(0.197)	--	(0.260)

TABLE II. PERFORMANCE RATINGS @ 20°C (unless otherwise noted):

I HOLD (A)		RESISTANCE (Ω) @ 20° C			TIME TO TRIP (s) @ 1A		OPERATING TEMPERATURE (°C)	
20°C	70°C	R MIN	R MAX	R _{1 MAX} *	TYP	MAX	MIN	MAX
0.180	0.109	0.8	2.0	4.0	15	35	-40	85

*Maximum device resistance at 20°C measured 1-hour post trip.

Additional Ratings @ 20°C

Lightning Withstand: ITU AT 1.5kV

Agency Recognition: UL, CSA, TUV
 Reference Documents: PS300

Precedence: This specification takes precedence over documents referenced herein.

Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame