

**Specification Status: Preliminary**

**Electrical Rating**


**Voltage: 16V MAX**  
**Current: 100A MAX**

Leads:  
 Nickel: 0.125 mm nom.

Tape:  
 None

Marking:

□□□□ — Lot Identification

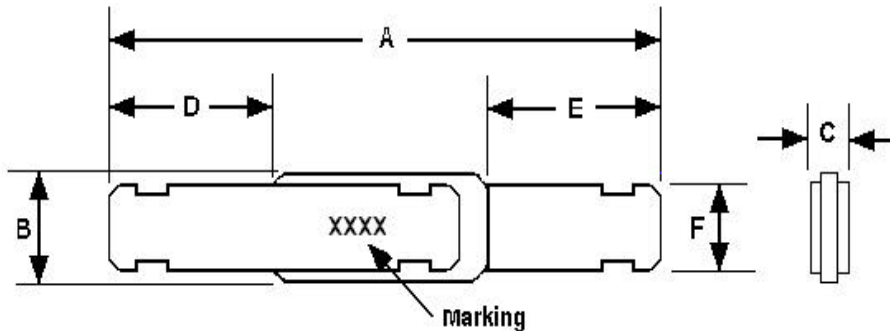

**TABLE I. DIMENSIONS:**

	A		B		C		D		E		F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	23.6	25.6	2.7	2.9	--	0.7	7.0	8.0	7.0	8.0	2.3	2.5
in*:	(0.93)	(1.01)	(0.11)	(0.11)	--	(0.03)	(0.28)	(0.32)	(0.28)	(0.32)	(0.09)	(0.10)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS:**

I HOLD	CURRENT TRIP LIMITS						TIME TO TRIP	REFERENCE RESISTANCE	ONE-HOUR POST-TRIP RESISTANCE	TRIPPED-STATE POWER DISSIPATION			
	AMPS AT 0°C		AMPS AT 25°C		AMPS AT 60°C						OHMS AT 25°C		OHMS AT 25°C
25°C HOLD	AMPS HOLD	TRIP	AMPS HOLD	TRIP	AMPS HOLD	TRIP	SECONDS AT 25°C, 7 A	MIN	MAX	MIN	MAX	MAX	
1.1	1.4	3.4	1.1	2.7	0.5	1.1	--	5	0.038	0.070	0.038	0.140	1.3

Reference Documents:

PS300

Precedence:

This specification takes precedence over documents referenced herein.

Effectivity:

Reference documents shall be the issue in effect on the date of invitation or bid.

CAUTION:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.