

Specification Status: Released

Electrical Rating
Voltage: 16V MAX
Current: 100A MAX

Leads:
 Nickel: 0.125mm nom

Tape:
 Polyester

Marking:
 Stripe
 _____ Manufacturer's Mark
 ☒ V24 _____ Part Identification
 ☐☐☐☐ _____ Lot Identification

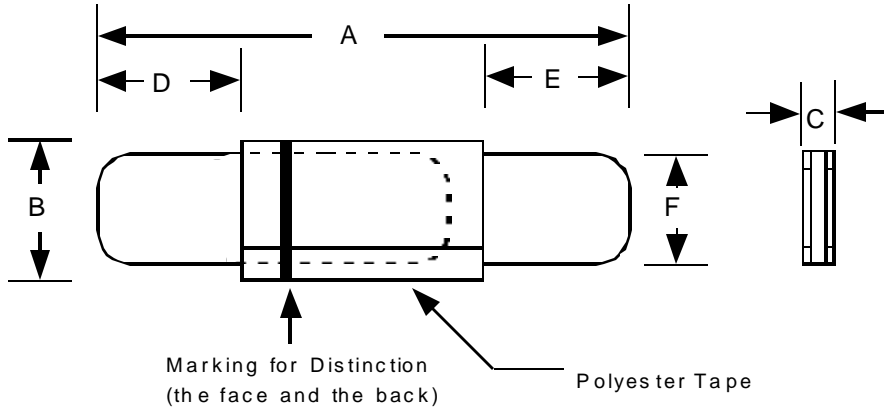


TABLE I. DIMENSIONS:

	A		B		C		D		E		F		G	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	23.8	26.2	4.9	5.3	--	0.8	3.5	5.7	3.5	5.7	3.9	4.1	--	--
in*:	(0.93)	(1.03)	(0.19)	(0.21)	--	(0.03)	(0.13)	(0.23)	(0.13)	(0.23)	(0.15)	(0.16)	--	--

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD	CURRENT TRIP LIMITS								TIME TO TRIP		REFERENCE RESISTANCE		ONE-HOUR POST-TRIP RESISTANCE		TRIPPED-STATE POWER DISSIPATION		
	AMPS AT 25°C		AMPS AT 0°C		AMPS AT 25°C		AMPS AT 60°C		AMPS AT 80°C		SECONDS AT 25°C, 12.0 A		OHMS AT 25°C				
HOLD	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	TYP	MAX	MIN	MAX	TYP	MAX	WATTS AT 25°C
2.4	3.1	7.9	2.4	5.9	1.2	3.2	-	-	--	5	0.014	0.026	0.038	0.052			1.7

Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.