

Polymer PTC Resettable Fuse For Battery Protection

LP-CW Series

Features


- ✧ Strap devices, Axial leaded
- ✧ Protection for NiCd/NiMH rechargeable battery packs, Li-ion /Polymer Li-ion battery
- ✧ Available in lead-free version
- ✧ Agency recognition: UL、CSA、TUV



UL
US




TUV
Rheinland



Product Dimensions



Standard style

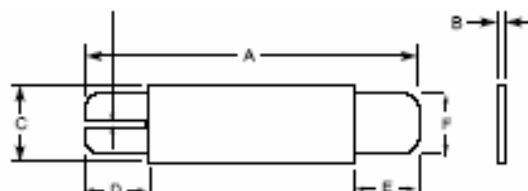

S-style


Unit: mm

Part number	A		B		C		D		E		F	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
LP-CW110	23.6	25.6	-	0.8	2.8	3.6	7.0	8.0	7.0	8.0	2.4	2.6
LP-CW110SLUF	31.9	33.9	-	0.7	2.7	2.9	6.8	7.8	15.5	16.5	2.4	2.6
LP-CW145UF	20.0	22.0	-	0.6	4.9	5.1	6.5	7.5	6.5	7.5	2.4	2.6
LP-CW145SLUF	25.3	27.3	-	0.6	4.9	5.1	2.0	3.0	16.3	17.3	2.3	2.5
LP-CW170	15.4	17.5	-	0.8	7.0	7.4	4.0	6.2	4.0	6.2	3.9	4.1
LP-CW170TUF	15.5	17.1	-	-	3.4	3.6	5.5	6.5	3.3	4.3	2.4	2.6
LP-CW175	20.8	23.5	-	0.8	3.5	3.9	4.6	6.6	4.6	6.6	2.4	2.6
LP-CW175SNUF	23.6	25.6	-	0.64	3.5	3.7	6.8	7.8	6.8	7.8	2.3	2.5
LP-CW175SNDUF	19.8	21.8	-	0.65	3.5	3.7	6.8	7.8	3.0	4.0	2.3	2.5
LP-CW200	20.9	23.1	-	0.8	4.1	4.5	3.0	4.8	3.0	4.8	2.9	3.1
LP-CW210	20.9	23.1	-	0.8	4.9	5.5	4.1	6.0	4.1	6.0	3.9	4.1
LP-CW240	23.8	26.2	-	0.8	4.9	5.3	3.5	5.7	3.5	5.7	3.9	4.1
LP-CW240SUF	8.4	8.6	-	0.65	4.9	5.1	7.5	8.5	4.3	5.3	-	-
LP-CW250SUF	27.9	29.0	-	0.68	4.0	4.2	7.5	8.5	7.5	8.5	2.3	2.5

Thermal Derating Chart-IH(A)

Part number	Maximum ambient operating temperatures(°C)										
	-40	-20	0	20	25	40	50	60	70	80	85
LP-CW110	2.0	1.7	1.4	1.2	1.1	0.8	0.6	0.5	0.3	0.2	0.1
LP-CW110SLUF	2.0	1.7	1.4	1.2	1.1	0.8	0.6	0.5	0.3	0.2	0.1
LP-CW145UF	2.7	2.3	1.9	1.5	1.45	1.1	0.95	0.75	0.5	0.3	0.1
LP-CW145SLUF	2.7	2.3	1.9	1.5	1.45	1.1	0.95	0.75	0.5	0.3	0.1
LP-CW170	3.2	2.7	2.2	1.80	1.7	1.3	1.0	0.8	0.5	0.3	0.1
LP-CW170TUF	3.2	2.7	2.2	1.80	1.7	1.3	1.0	0.8	0.5	0.3	0.1
LP-CW175	3.2	2.7	2.2	1.84	1.75	1.3	1.0	0.8	0.5	0.3	0.1
LP-CW175SNUF	3.2	2.7	2.2	1.84	1.75	1.3	1.0	0.8	0.5	0.3	0.1
LP-CW175SNDUF	3.2	2.7	2.2	1.84	1.75	1.3	1.0	0.8	0.5	0.3	0.1
LP-CW200	3.7	3.2	2.6	2.12	2.0	1.5	1.2	0.9	0.5	0.3	0.1
LP-CW210	4.1	3.5	2.9	2.26	2.1	1.6	1.3	1.0	0.7	0.4	0.1
LP-CW240	4.4	3.7	3.1	2.54	2.4	1.9	1.5	1.3	0.8	0.5	0.1
LP-CW240SUF	4.4	3.7	3.1	2.54	2.4	1.9	1.5	1.3	0.8	0.5	0.1
LP-CW250SUF	4.4	3.7	3.2	2.62	2.5	2.0	1.7	1.6	0.9	0.5	0.1


Typical Time-to-Trip Charts at 25°C

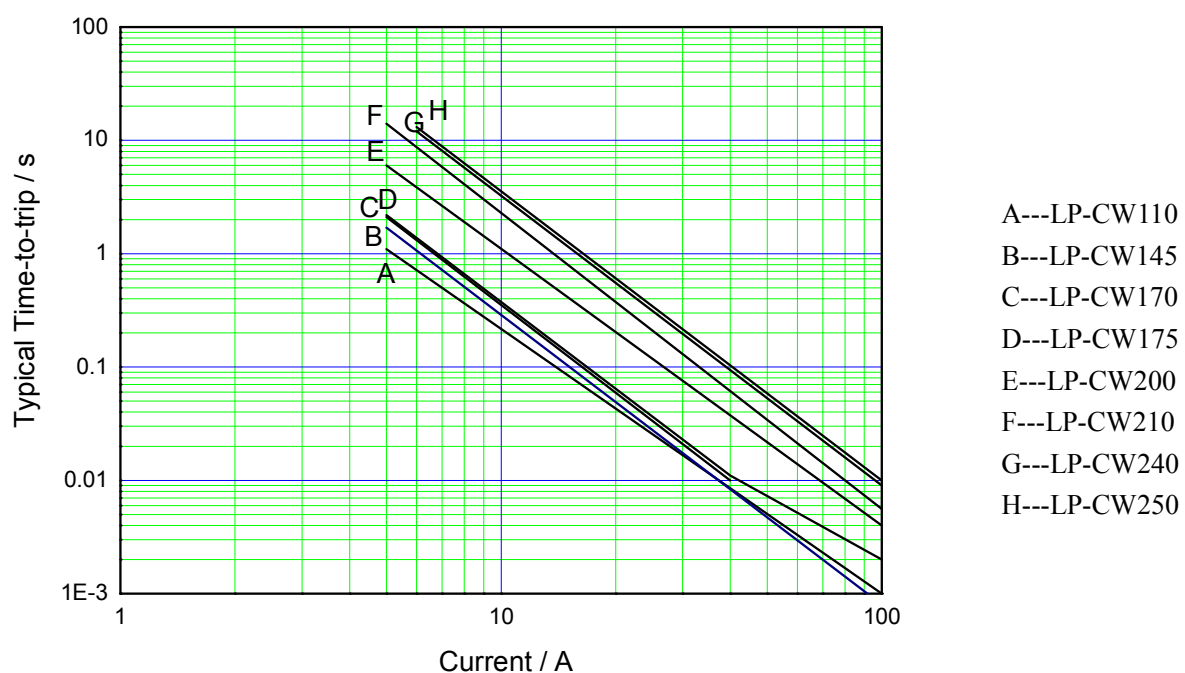


Electrical Characteristic

Part number	I_H	I_T	V_{max}	I_{max}	P_d	I_{trip}	T_{trip}	R_{min}	R_{max}	R_{1max}
	(A)	(A)	(V)	(A)	(W)	Current (A)	Time (S)	(Ω)	(Ω)	(Ω)
LP-CW110	1.1	2.7	16	100	0.7	7.0	5.0	0.038	0.070	0.140
LP-CW110SLUF	1.1	2.7	16	100	1.3	5.5	5.0	0.038	0.070	0.140
LP-CW145UF	1.45	3.1	16	100	1.4	7.25	5.0	0.030	0.052	0.105
LP-CW145SLUF	1.45	3.1	16	100	1.4	7.25	5.0	0.030	0.052	0.105
LP-CW170	1.7	3.4	16	100	0.7	8.5	5.0	0.030	0.052	0.105
LP-CW170TUF	1.7	3.9	16	60	1.6	8.5	5.0	0.030	0.050	0.100
LP-CW175	1.75	3.6	16	100	0.8	8.75	5.0	0.029	0.051	0.102
LP-CW175SNUF	1.75	3.6	16	100	1.4	8.75	5.0	0.029	0.051	0.102
LP-CW175SNDUF	1.75	3.6	16	100	1.4	8.75	5.0	0.029	0.051	0.102
LP-CW200	2.0	4.7	16	100	0.9	10.0	5.0	0.022	0.039	0.078
LP-CW210	2.1	4.7	16	100	1.2	10.0	5.0	0.018	0.030	0.060
LP-CW240	2.4	5.9	16	100	1.2	12.0	5.0	0.014	0.026	0.052
LP-CW240SUF	2.4	5.9	16	100	1.2	12.0	5.0	0.014	0.026	0.052
LP-CW250SUF	2.5	5.2	16	100	2.0	12.5	5.0	0.015	0.025	0.050

Marking System

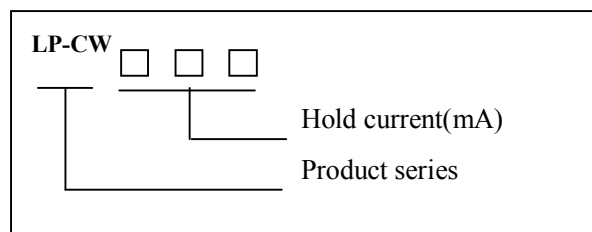

Part Numbering System

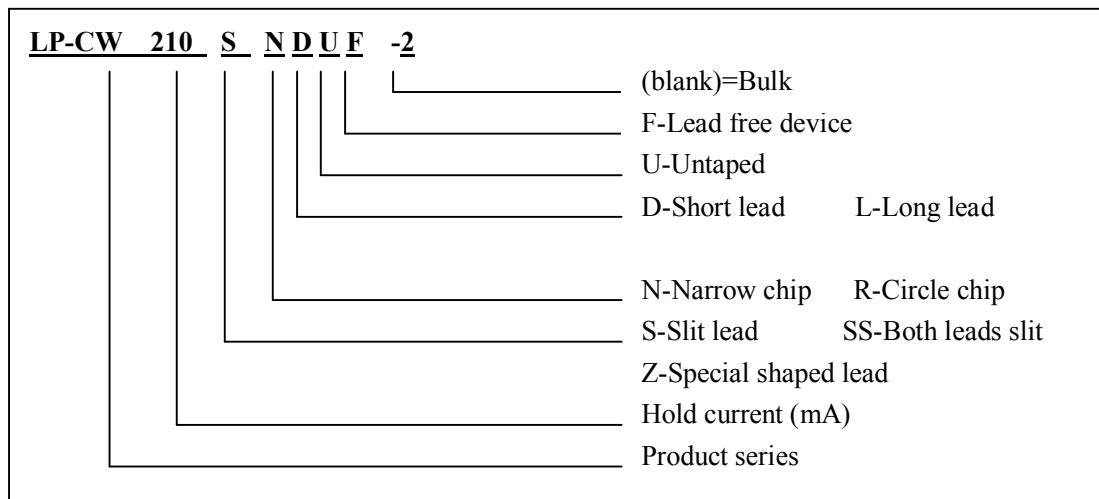

Test Procedures And Requirements

Test	Test Conditions	Accept/Reject Criteria
Resistance	In still air @ 25°C	$R_{min} \leq R \leq R_{max}$
Time to Trip	Specified current, V_{max} , 25°C	$T \leq$ maximum Time to Trip
Hold Current	30min, at I_H	No trip
Trip Cycle Life	V_{max} , I_{max} , 100cycles	No arcing or burning
Trip Endurance	V_{max} , 24hours	No arcing or burning

Physical Characteristics and Environmental Specifications

Physical Characteristics

Lead material	0.125mm nominal thickness, quarter-hard nickel
Tape material	Polyester

Environmental Specifications

Test	Conditions	Resistance Change
Passive aging	-40°C, 1000hours	$\pm 5\%$
	60°C, 1000hours	$\pm 10\%$
Humidity aging	60°C/95% RH, 1000hours	$\pm 10\%$
Vibration	MIL-STD-883D ,Method 2026	No change

Electrical Specifications:

I_H =Hold current: maximum current at which the device will not trip at 25°C still air.

I_T =Trip current: minimum current at which the device will always trip at 25°C still air.

V_{max} =Maximum voltage device can withstand without damage at rated current.

I_{max} =Maximum fault current device can withstand without damage at rated voltage.

T_{trip} =Maximum time to trip(s) at assigned current.

P_d =Typical power dissipation: typical amount of power dissipated by the device when in state air environment.

R_{min} =Minimum device resistance at 25°C prior to tripping.

R_{max} =Maximum device resistance at 25°C prior to tripping.

Packaging and Storage

Packaging

Bulk, 1000pcs per bag

Storage

The maximum ambient temperature shall not exceed 40°C. Storage temperatures higher than 40°C could result in the deformation of packaging materials. The maximum relative humidity recommended for storage is 70%. High humidity with high temperature can accelerate the oxidation of the solder plating on the termination and reduce the solderability of the components. Sealed plastic bags with desiccant shall be used to reduce the oxidation of the termination and shall only be opened prior to use. The products shall not be stored in areas where harmful gases containing sulfur or chlorine are present.

Warning:

PPTC devices are intended for protection against occasional over-current or over-temperature fault conditions, and should not be used when repeated fault conditions are anticipated. Operation beyond maximum ratings or improper use may result in device damage and possible electrical arcing and flame.

Notes:

The specification is intended to present application, product and technical data to assist the user in selecting PPTC circuit production devices. However, users should independently evaluate and test the suitability of each product. Wayon makes no warranties as to the accuracy or completeness of the information and disclaims any liability resulting from its use. Wayon's only obligations are those in the Wayon Standard Terms and Conditions of Sale and in no case will Wayon be liable for any incidental, indirect, or consequential damages arising from the sale, resale, or misuse of its products. Wayon reserves the right to change or update, without notice, any information contained in this specification.